

(19)



(11)

**EP 1 670 688 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**02.01.2008 Bulletin 2008/01**

(51) Int Cl.:  
**B65D 1/26** <sup>(2006.01)</sup> **B65D 1/44** <sup>(2006.01)</sup>

(21) Application number: **04749453.9**

(86) International application number:  
**PCT/US2004/009357**

(22) Date of filing: **26.03.2004**

(87) International publication number:  
**WO 2005/042356 (12.05.2005 Gazette 2005/19)**

(54) **ERGONOMIC DISPOSABLE CUP HAVING IMPROVED STRUCTURAL INTEGRITY**

ERGONOMISCHER WEGWERF-BECHER MIT VERBESSERTER FORMFESTIGKEIT  
GOBELET JETABLE ERGONOMIQUE PRESENTANT UNE MEILLEURE INTEGRITE  
STRUCTURALE

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **01.10.2003 US 676807**

(43) Date of publication of application:  
**21.06.2006 Bulletin 2006/25**

(73) Proprietor: **Solo Cup Operating Corporation**  
**Highland Park, IL 60035 (US)**

(72) Inventors:  
• **SMITH, Stephen, Alan**  
**Naperville, IL 60540 (US)**  
• **SMITH, Kevin, Ray**  
**Round Lake Beach, IL 60073 (US)**  
• **WIEDMEYER, Warren, Giles**  
**Slinger, WI 53086 (US)**  
• **HEALY, Kimberly, Vaile**  
**Chicago, IL 60657 (US)**  
• **GOLDEN, Randy**  
**Ada, OK 74820 (US)**  
• **DESCHAMPS, Rudy**  
**Mahomet, IL 61853 (US)**

- **KHAN, Irshad**  
**Round Lake Beach, IL 60073 (US)**
- **RUTTER, Bryce, G.**  
**St. Louis, MO 63141 (US)**
- **BONE, Brian, C.**  
**St. Louis, MO 63146 (US)**
- **LOUDENSLAGER, John, H.**  
**Phoenix, AZ 85003 (US)**
- **STILLERMAN, Jan, Rolf**  
**Phoenix, AZ 85018 (US)**

(74) Representative: **Moore, Barry et al**  
**Hanna, Moore & Curley**  
**13 Lower Lad Lane**  
**Dublin 2 (IE)**

(56) References cited:

<b>EP-A- 0 371 918</b>	<b>DE-B- 1 175 564</b>
<b>DE-B- 1 216 139</b>	<b>FR-A- 2 207 836</b>
<b>GB-A- 1 096 451</b>	<b>GB-A- 1 251 595</b>
<b>GB-A- 1 461 394</b>	<b>GB-A- 2 352 612</b>
<b>US-A- 3 085 730</b>	<b>US-A- 3 288 340</b>
<b>US-A- 3 342 370</b>	<b>US-A- 4 245 685</b>

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 670 688 B1**

**Description****Technical Field of the Invention**

5     **[0001]** The present invention relates generally to the field of thermoformed nestable containers, specifically, the construction of a container such as a cup or cup-like article that is capable of being nested with a similar article. More specifically, the present invention, in its preferred embodiment, relates to improved grippability and structural integrity in thermoformed nestable containers.

**Background of the Invention**

10     **[0002]** For several decades, there has been an increase in the use of disposable containers by consumers at the workplace, in public areas such as parks, beaches, campgrounds, and the like, as well as in the home. Generally, disposable, nestable containers made of foam materials - e.g., Styrofoam® - and insulated paper were once the only  
 15     alternatives to glass or reusable plasticware containers. However, in recent years, thermoformed plastic molded containers have been a replacement to the less environmentally concerned foam articles in the industry. In particular, the use of nestable thermoformed containers has been on the rise. These thermoformed articles are also remarkably useful in containing cold fluids.

20     **[0003]** Thermoplastic materials are particularly advantageous for manufacturers as the materials do not require expensive foaming agents and need no surface lamination - each of which is a feature resulting in fewer stages of the manufacturing process. Moreover, for consumers, containers constructed from these materials are generally more durable than paper containers, are usually of a single-piece construction, and are inexpensive and recyclable.

25     **[0004]** Thermoforming begins with a thin sheet or web of material such as polyethylene, polypropylene, polyester, or polystyrene having a thickness within a range of from approximately 8 mils to 100 mils, depending on the size of the container to be manufactured. Cups and similar articles are typically made from plastic sheet having a pre-thermoforming thickness from approximately 30 to 60 mils, but the finished articles may be thinner after thermoforming. The sheet or web is heated to a temperature suitable for thermoforming - in a range from approximately 110 °C to about 200 °C for the above-mentioned materials - and is thereafter fed into a conventional forming machine in which the process proceeds under applied positive and/or negative air pressure conditions. A mold cavity is used to impart a particular formational  
 30     construction into the thin-walled container as the plastic material is drawn into the mold using vacuum pressure on one side of the article and/or a positive pressure on the opposite surface of the material. The formational construction of the container may be decorative, but generally has a particular utility - e.g., texturing for grasping and formations for nestability in addition to other utilities. The processing period for a normal thermoforming operation is typically between 1 and 20 seconds.

35     **[0005]** One disadvantage to many existing cup and container designs is that the round design is not conducive to gripping, a problem encountered with all cup designs, but especially in larger-volume cups. The user must often exert more than a desirable amount of gripping pressure, in order to stabilize a cup that is too large to wrap fingers around. Additionally, cold drinks often cause condensation on the outside of a cup, creating a problem with slipping, especially with smooth plastic cups. Although this slipping is a problem itself, it can be exacerbated in a cup lacking a stable gripping  
 40     surface. Annular ribs may increase the friction between the cup and the user's hand to help alleviate slipping, but do not do anything to remedy the gripping problems associated with the round design. Therefore, a need exists to provide a more ergonomic and stable gripping surface for a thermoformed plastic cup, especially a larger-volume cup, while at the same time reducing slipping caused by condensation on the outside of the cup.

45     **[0006]** Another problem with thermoformed plastic nestable containers is structural integrity. Sidewalls of thin-walled thermoformed containers often bend and deflect inward easily when grasped by a user. A deflection of this sort may constrict the volume of the container causing unpleasant fluid overflows. Additionally, deflection of the sidewall can make the container more difficult to grip, as well as potentially leading to cracking. One solution to the identified problem is to provide thicker material constructions, but this increases production costs. Additionally, thicker constructions tend to increase the stack height among nested containers. These respective phenomena limit the number of containers that  
 50     may be nested in a confined area and can prevent the nested containers from being easily separated. Another, more effective means known and used in the art is creating annular ribs and/or shoulders in the sidewall, which can add significant rigidity to the surrounding areas of the sidewall. Creating rigidity-enhancing features in the sidewall avoids the problems associated with using a thicker sidewall. However, the strength enhancement that may be achieved by using ribs and shoulders is limited, especially in the middle regions of the sidewall, where gripping normally occurs.  
 55     Therefore, a need exists to further increase the strength of the sidewall of a thermoformed container, while avoiding the use of thicker material.

**[0007]** The present invention solves these two problems primarily by creating arcuately formed longitudinal recesses in the sidewall. These recesses both provide an ergonomic and effective gripping surface and increase structural integrity.

However, the recesses can create problems with proper nesting of the containers, which tend to telescope because of their lack of complete rotational symmetry. Thus, a need further exists for a means to ensure proper nesting of containers having recesses in their sidewalls.

**[0008]** Additionally, containers having recesses in their sidewalls may rub together during manufacturing. Cups are often stacked inside each other while being transported along a line by machinery during certain manufacturing processes. The cups may rotate during this movement, causing them to rub against the cups stacked above and below them. This rubbing can create wear on the cup, scratching the surface. While not all manufacturing processes present this problem, it can be a source of concern when manufacturing containers having recesses in their sidewalls. Thus, a need exists to solve the problem of rubbing caused by movement and rotation of the cups during manufacturing. Prior cups and containers, and methods of manufacturing such, do not adequately address the problems mentioned herein. U.S. Patent No. 3,288,340 discloses a cup having a side wall and a bottom wall. The lower portion of the side wall flares upwardly and is provided with a series of closely spaced vertical flutes, which primarily serve a decorative purpose.

**[0009]** British Patent No. 1,461,394 discloses a cup provided with vertically extending circumferential stacking means. The lower external section of the stacking means includes a plurality of circumferentially distributed, triangular-shaped abutment surfaces which diverge upwardly in pairs from bottom radial lines of intersection. The upper internal section of the stacking means includes a plurality of pairs of generally trapezoidal internal recess surfaces which converge downwardly and extend inwardly from the inner surface of the container wall. Pairs of the converging recess surfaces define recesses for interlockingly accommodating complementary pairs of the external abutment surfaces of a like container.

**[0010]** The present invention provides an economical solution to the recognized problems. The present invention is intended to provide a suitable formational construction for thin-walled thermoformed containers.

### Summary of the Invention

**[0011]** Accordingly the present invention provides a container according to claim 1. Advantageous embodiments are provided in the claims dependent thereto.

**[0012]** Such a container may be thermo formed having improved structural integrity in the sidewalls.

### Brief Description of the Drawings

**[0013]** In the accompanying drawings forming part of the specification, and in which like numerals are employed to designate like parts throughout the same,

Figure 1 is a perspective view of a cup representing the preferred embodiment of the present invention;

Figure 2 is a side elevation view of the cup shown in Figure 1;

Figure 3 is a side elevation view of the cup shown in Figure 1, rotated 90 degrees from Figure 2;

Figure 4 is a top plan view of the cup shown in Figure 1;

Figure 5 is a bottom plan view of the cup shown in Figure 1;

Figure 6 is a cross-section view of the cup shown in Figure 1, taken along line 1-1 in Figure 4;

Figure 7 is a cross-section view of the cup shown in Figure 1, taken along line 2-2 in Figure 4;

Figure 8 is a focused perspective view of the bottom of the cup shown in Figure 1, magnified to show detail in the annular shoulder and the arched portions;

Figure 9 is a partial cross-section view of the cup shown in Figure 1 nested upon an identical cup, taken along line 2-2 in Figure 4;

Figure 10 is a perspective view of a cup representing an alternate embodiment of the present invention, having sharply angled arched portions and concavely curved beveled portions;

Figure 11 is a side elevation view of the cup shown in Figure 10;

Figure 12 is a top plan view of the cup shown in Figure 10;

Figure 13 is a focused perspective view of the bottom of the cup shown in Figure 10, magnified to show detail in the annular shoulder and the arched portions;

Figure 14 is a perspective view of a cup representing an example not falling within the scope of the claims and having an elliptical base and no arched portions;

Figure 15 is a bottom plan view of the cup shown in Figure 14;

Figure 16 is a side elevation view of the cup shown in Figure 14;

Figure 17 is a side elevation view of the cup shown in Figure 14, rotated 90 degrees from Figure 16;

Figure 18 is a cross-section view of the cup shown in Figure 14, taken along line 3-3 in Figure 15;

Figure 19 is a cross-section view of cup shown in Figure 14, taken along line 4-4 in Figure 15;

Figure 20 is a perspective view of a cup representing another example not falling within the scope of the claims and

having multiple recesses;

Figure 21 is a side elevation view of the cup shown in Figure 20;

Figure 22 is a bottom plan view of the cup shown in Figure 20;

Figure 23 is a broken cross-section view of the cup shown in Figure 20 nested upon an identical cup;

5 Figure 24 is a broken cross-section view of the top of a cup having an upper shoulder and a reverse-tapered upper portion nested upon an identical cup;

Figure 25 is a broken side elevation view of the bottom of a cup having a recess and an arched portion, wherein the annular shoulder is partly contiguous with the base shoulder;

10 Figure 26 is a perspective view of a cup representing an alternate embodiment of the present invention, wherein the beveled portions are flat and the transition between the shoulder and the arched portion is smooth; and

Figure 27 is a focused perspective view of the bottom of the cup shown in Figure 26, magnified to show detail in the annular shoulder and the arched portions.

### Detailed Description of Preferred Embodiment

15 **[0014]** While the invention is susceptible of embodiment in many different forms, this disclosure describes, in detail, preferred embodiments of the invention with the understanding that the present disclosure is to be considered as an exemplification of the principles of the invention and is not intended to limit the broad aspects of the invention to the embodiments illustrated.

20 **[0015]** Referring generally to the appended Figures, the present invention can be more readily understood. The disclosed preferred container is generally referenced by the number "10" in the following disclosure and drawings. Other components are similarly and consistently numbered throughout the specification and drawings. While the present invention is particularly designed for use in thermoformed cups, cups made from other manufacturing processes and other types of containers may also be capable of utilizing and benefitting from the disclosed invention.

25 **[0016]** As illustrated in Figures 1-9, the container is generally a thermoformed cup 10 including an open top 12 defined by an annular rim 14, a base 16, and a sidewall 18 extending between the top 12 and the base 16. The sidewall 18 has at least one recess 20 and an annular shoulder 22 located between the recess 20 and the base 16, and the annular shoulder 22 has at least one arched portion 23. Preferably, the cup 10 also includes at least one annular rib 24 and a lower portion 26 extending between the annular shoulder 22 and the base 16, having at least one beveled portion 27 aligned with the recess 20.

30 **[0017]** The top 12 of the cup 10 is a generally circular opening 13 defined by an annular rim 14, as shown in Figures 1 and 4. The rim 14 is preferably thicker and rolled toward the outside of the cup 10, which is a common characteristic of thermoformed drinking cups. The rolled rim 14 forms a smooth surface for contact with the mouth of a user, as well as providing increased strength and rigidity to the top 12 of the cup 10. Although a rolled rim 14 is preferred, other known rim 14 configurations may be used in accordance with the present invention.

35 **[0018]** As illustrated in Figures 5 and 8, the base 16 is connected to the lower portion 26 of the sidewall 18, and is generally a circular disk having beveled edges 30 and a circular recess 32 in the center. The shape of the base 16 need not be circular, as a multitude of other shapes will function effectively. Additionally, the recess 32 may not be circular, or alternatively, may not be present at all. Notably, the shape of the top 12 need not be the same as the base 16. In one embodiment of the cup 110, the base 116 is elliptical and the top 112 is circular. In the preferred embodiment, the base 16 has beveled edges 30 corresponding to the beveled portions 27 of the lower portion 26 of the sidewall 18 (discussed below). Preferably, the beveled edges 30 are concavely curved, as shown in Figures 1 and 8. Alternatively, the beveled edges 30 may be straight, as shown in Figures 26 and 27, or may take another shape, but their shape is generally dependent on the shape of the beveled portions 27 of the lower portion 26. The recess 32 in the center of the base 16 both improves the rigidity of the base 16 and provides a more stable and balanced surface for resting upon another surface. The base 16 is connected to the sidewall 18 around its entire perimeter, forming a base shoulder 34.

40 **[0019]** The sidewall 18 connects the top 12 with the base 16, extending between the top 12 and the base 16 and making up the bulk of the container. The sidewall 18 is generally cylindrical, as shown in Figures 1-7, and, because the opening 13 is generally larger than the base 16, the sidewall 18 tapers from top 12 to the base 16. In other words, the diameter of the cylinder formed by the sidewall 18 is larger near the top 12 and decreases as the base 16 is approached, creating a frustoconical shape. However, as discussed below, the lower portion 26 of the sidewall 18 preferably has an opposite taper relative to the rest of the sidewall 18. The shape of the sidewall 18 is largely dictated by the shapes and sizes of the top 12 and the base 16, and thus, the sidewall 18 may have one of a variety of other shapes. The sidewall 18 has several characteristic features, including one or more recesses 20, an annular shoulder 22, a lower portion 26 connecting the annular shoulder 22 to the base 16, and one or more annular ribs 24, 28.

50 **[0020]** Alternatively, the sidewall 18 may contain an upper shoulder 46, creating an upper portion 48 extending between the upper shoulder 46 and the container top 12. The upper portion 48 is preferably tapered oppositely to the rest of the sidewall 18, as illustrated in Figure 24. In other words, the diameter of the upper portion 46 is greater at the upper

shoulder 46 than at the top 12 of the cup 10. The reverse taper of the upper portion 48 provides a means for stacking a plurality of cups 10, as shown in Figure 24. In this embodiment, the lower portion 26 need not be reverse-tapered, and can be either completely absent or present only under the arched portions 23.

**[0021]** In the preferred embodiment, shown in Figures 1-9, the sidewall 18 has two recesses 20. These recesses 20 are longitudinal, i.e. having a much larger vertical dimension (perpendicular to the base 16) than a circumferential dimension. The recesses 20 are preferably arcuately formed, being circumferentially wider towards the top 12 and bottom and narrower in the middle. Further, the preferred recesses 20 are smooth and concave, curving inward toward the center of the cup 10. Preferably, the concavity of the recesses 20 is deeper relative to the rest of the sidewall 18 near the top of the recesses 20, forming a swale 21 in each recess, as illustrated in Figure 7. The recesses 20 begin nearer to the top 12 of the cup 10 and preferably terminate at the annular shoulder 22.

**[0022]** Although the above characteristics are preferable, the recesses 20 can take any of a variety of different forms. For example, while the recesses 20 are preferably longitudinal and arcuately formed, these characteristics are not necessary. Also, the degree or smoothness of the concavity of the recesses 20 may vary, and the swales 21 need not be present. Alternately, the recesses 20 may not be concave, being deeply recessed near the edges of the recesses 20 and having a slight convex curvature. The surface of the recesses 20 may have ridges or projections (such as a logo) to enhance gripping, rather than being smooth. In addition, the recesses 20 may be located anywhere on the sidewall 18 and need not terminate at the annular shoulder 22. The recesses 20 may exist completely above the annular shoulder 22, or may pass through the annular shoulder 22 and extend to the base 16. Finally, the cup 10 may have any number of recesses 20. In one embodiment discussed below, the cup 10 has as many as twenty or more recesses 20. These recesses 20 serve the dual purpose of providing an ergonomic gripping surface for the user and, as discussed below, significantly increasing the strength and rigidity of the sidewall 18.

**[0023]** The annular shoulder 22 exists between the recesses 20 and the base 16, as shown in Figures 2, 5, and 8. The annular shoulder 22 is generally circular, except for the arched portions 23 adjacent to the recesses 20. Alternately, the annular shoulder 22 may take another shape, such as an elliptical shape in one embodiment. Preferably, the entire recess 20 is located on the opposite side of the annular shoulder 22 as the base 16, and the recess 20 terminates at the annular shoulder 22. In other words, the recess 20 exists only on one side of the annular shoulder 22 and the recess 20 ends at the point of contact between the recess 20 and the annular shoulder 22. However, as noted above, the recesses 20 may pass through the annular shoulder 22, so the shoulder 22 is still considered to exist between the recess 20 and the base 16 as long as a portion of the recess 20 is located on the side of the shoulder 22 opposite the base 16.

**[0024]** In the cup 10 illustrated in Figures 1-9, the shoulder 22 includes two arched portions 23 aligned with the two recesses 20. The shoulder 22 may contain any number of arched portions 23, and preferably, the shoulder 22 has an arched portion 23 to correspond with every recess 20. The arched portions 23 are preferably smoothly curved with a sharp transition 36 between each arched portion 23 and the rest of the annular shoulder 22, as shown in Figures 1, 2, and 8. However, this is not an essential characteristic. For example, the arched portions 23 shown in Figures 11 and 13 have a sharp transition 36 and are polygonal in shape, while the arched portions 23 shown in Figures 26 and 27 have a smooth transition 36 and a smoothly curved shape. The arched portions 23 may also be square, triangular, or any other shape that accomplishes the functions articulated herein. Further, the arched portions 23 need not be aligned with the recesses, and could be located elsewhere on the annular shoulder 22, for example at a position 90 degrees around the perimeter of the sidewall 18 from the recesses 20. Finally, the annular shoulder 22 is preferably separated completely from the base 16 by the lower portion 26 of the sidewall 18. However, the annular shoulder 22 may be at the bottom of the sidewall 18, directly connecting the sidewall 18 to the base 16, with the lower portion 26 either entirely absent or only intermittently present where the annular shoulder 22 rises to form the arched portions 23, as illustrated in Figure 25. In other words, the annular shoulder 22 may be contiguous, either entirely or in part, with the base shoulder 34 connecting the sidewall 18 to the base 16.

**[0025]** The sidewall 18 of the cup 10 illustrated in Figures 1-9 has a lower portion 26 separating the annular shoulder 22 from the base 16, the lower portion 26 including two beveled portions 27 aligned with the recesses 20. The lower portion 26 is generally annular or cylindrical, and is preferably tapered or flared oppositely to the rest of the sidewall 18, generally to provide a stacking means to a plurality of nested cups 10. In other words, the diameter of the lower portion 26 near the annular shoulder 22 is slightly smaller than the diameter at the base 16. The lower portion 26 illustrated in Figures 5 and 8 is generally circular, but the lower portion 26 may take different shape. In one embodiment, the lower portion 126 is elliptical. The lower portion 26 is typically more rigid than the remainder of the sidewall 18 because the annular shoulder 22 and the base shoulder 34 add strength to the lower portion 26. Finally, as described above and shown in Figure 25, the lower portion 26 may be completely absent or only intermittently present beneath the arched portions 23 of the annular shoulder 22, if the annular shoulder 22 is wholly or partially contiguous with the base shoulder 34.

**[0026]** The lower portion 26 preferably has two beveled portions 27 adjacent to, and aligned with, the arched portions 23 of the annular shoulder 22 and the recesses 20. Any number of beveled portions 27 may be present, or the beveled portions 27 may be entirely absent, but preferably, the lower portion 26 has a beveled portion 27 corresponding to each recess 20. Preferably, the beveled portions 27 extend from the base to the annular shoulder 22, but the beveled portions

27 may alternately only extend a portion of the distance between the base 16 and the annular shoulder 22. In the preferred container, the beveled portions 27 are concavely curved, as shown in Figures 1 and 8, but this characteristic is not essential. For example, the beveled portions 27 may be flat, as shown in Figures 26 and 27, or convexly curved, or could take another form, such as a polygonal shape. Alternately, the base and lower portion could be elliptically shaped to effectively create beveled portions, without any blunt angles. Finally, if the arched portions 23 are not aligned with the recesses 20, the beveled portions 27 may be aligned with either the arched portions 23 or the recesses 20, or aligned with both.

**[0027]** The cup 10 preferably has a stacking shoulder, generally to provide a stacking means to a plurality of nested cups 10. The use of a variety of different types of stacking shoulders is well known in the art of thermoformed cup manufacturing. A stacking shoulder can provide a stacking means to a plurality of nested cups 10 in a variety of manners, by providing a point of contact at which a lower cup 10 exerts force to support an upper cup 10 nesting inside the lower cup 10. This is generally accomplished because the rapid change in diameter of the cup created by the stacking shoulder causes a point of contact between the outer surface 42 of the upper cup 10 and the inner surface 40 of the lower cup 10. The point of contact can be created, for example, between the stacking shoulder of one cup the top 12, base 16, or stacking shoulder of another cup, providing direct vertical support. Alternately, the point of contact may provide support by frictional force between the sidewalls 18 of two cups 10, rather than direct support.

**[0028]** In the preferred embodiment, the annular shoulder 22 functions as a stacking shoulder. This feature is illustrated, for example, in Figure 23, where a portion of the base 216 sits upon the inner surface 240 of the annular shoulder 222 when one cup 210 is nested upon a second identical cup 210. As shown, the reverse taper of the lower portion 226 aids in providing a more effective stacking means, by allowing the base 216 to be wider in diameter than the annular shoulder 222. Alternately, the cup 10 may have a stacking shoulder located elsewhere, as is known in the art. The stacking shoulder may be located near the top 12 of the cup 10, as illustrated in Figure 24, where the upper shoulder 46 functions as a stacking shoulder. Although the cup 10 shown in Figure 24 contains a reverse-tapered upper portion 48, aiding in providing a stacking means, the upper portion 48 need not be reverse-tapered to function effectively. Other methods of using a stacking shoulder to provide a stacking means to a plurality of nested cups 10 are known in the art.

**[0029]** Multiple annular ribs 24,28 are included in the sidewall 18 to add strength, as illustrated in Figures 1-3. In the preferred embodiment, the sidewall 18 has three annular ribs 24,28: two closely spaced ribs 28 near the top 12 and a single central rib 24 approximately at the top of the recess 20. The central rib 24 preferably contains two curved portions 25 aligned with the recesses 20. If a different number of recesses 20 are present, the rib 24 preferably contains a curved portion 25 corresponding to each recess 20. Alternately, the curved portions 25 may not be present, especially if the rib 24 is located closer to the top 12 of the cup 10, and does not have to curve around the top of the recess 20. In other embodiments, a greater or fewer number of ribs 24,28 may be present.

**[0030]** As illustrated in Figures 6 and 7, the sidewall 18 has an inner surface 40 and an outer surface 42. Most of the above-mentioned components of the cup 10 are located on the outer surface 42. The inner surface 40 includes a raised ledge 44 that is cooperatively dimensioned with the arched portion 23 so that the raised ledge 44 fits within the arched portion 23 of a second identical container when the second container is placed inside the first container. In a thin-walled thermoformed cup 10, such as the preferred embodiment, the raised ledge 44 is the inverse projection created on the inner surface 40 of the sidewall 18 as the sidewall 18 bends to form the arched portion 23. Thus, in the preferred embodiment, the arched portion 23 and the raised ledge 44 are easily formed with nearly identical dimensions. In a thicker-walled container, the raised ledge 44 may be a structure separate from the arched portion 23.

**[0031]** Cooperatively dimensioning the raised ledge 44 and the arched portion 23 is a means of ensuring that two cups 10 nest properly together. Such a means of ensuring proper nesting is of key importance in the thermoformed cup industry. Standard cylindrical thermoformed cups nest together easily because they are all rotationally symmetrical with each other, i.e. no matter how the cup is rotated about a central longitudinal axis, it will appear identically. Additionally, cups having nonsymmetrical sidewall features, such as vertical ribs, recesses, or embossments, will nest together easily, provided that the depth of the nonsymmetrical features is smaller than the width of the air gap that exists between two nested cups. However, adding deeper recesses 20 destroys this rotational symmetry, and the recesses 20 will not naturally align with each other as the cups 10 are randomly stacked, creating difficulty with nesting. Therefore, a means of ensuring proper nesting is necessary so that all the cups 10 in a given stack nest tightly and symmetrically together. Cooperatively dimensioning the raised ledge 44 and the arched portion 23 accomplishes this by "locking" the top cup 10 in place when it is stacked on a lower cup 10, preventing the top cup 10 from rotating and becoming misaligned. To accomplish this function, only one raised ledge 44 and one arched portion 23 are necessary. Increasing the number of raised ledges 44 and arched portions 23 may create a greater number of nesting positions, provided they are equidistantly spaced around the circumference of the sidewall 18, further improving nesting between the cups 10.

**[0032]** Another means for ensuring proper nesting is forming the base 116, the lower portion 126, and the annular shoulder 22 elliptically, rather than circularly, as shown in Figure 15. Unlike a circle, which is perfectly rotationally symmetrical, an ellipse will not sit symmetrically upon an identical, rotated ellipse. Therefore, as cups 110 with elliptical bottoms are stacked, the elliptical shapes encourage symmetrical alignment of each cup 110 upon the next, as the cups

110 will not fit together properly unless they are substantially aligned with each other. Using an elliptical base 116 may be less effective than the arched portions 23 and raised ledges 44 in ensuring proper nesting, however, other factors may favor the use of an elliptical base 116.

**[0033]** A third means for ensuring proper nesting is the use of a greater number of recesses 220, consistently spaced on the outer surface 242 of the sidewall 218, projecting deeper into the cup 210 than the recesses 220 of the preferred embodiment, as shown in Figures 20-23. The projections of the recesses 220 on the inner surface 240 of the sidewall 218 form ridges 243 that will sit inside the recesses 220 as the cups 210 are stacked together, shown in Figure 23. Equidistantly spacing a number of recesses 220 about the circumference of the sidewall 218 creates a number of different positions which effect proper nesting. Consequently, little manipulation may be required for the cup 210 to nest properly. Unlike the first two means for ensuring proper nesting, which "urge" the cup into one of a small number of proper nesting positions, the third means "allows" the cup 210 to nest properly by providing a number of different positions in which the cup 210 will nest properly. Still other means of ensuring proper nesting exist.

**[0034]** The present invention has the additional benefit of limiting movement and wear on the cups 10 during manufacturing. As stated above, movement and rotation of the cups 10 during manufacturing may cause the cups 10 to rub together. The means for ensuring proper nesting also limits the rotation of the cups 10 within each other during manufacturing, just as they do when the cups 10 are stacked together in commercial or private use. Once the cups 10 are "locked" into a proper nesting position, they do not rotate within each other or rub together. Thus, the means for ensuring proper nesting provides an additional benefit in the manufacturing of thermoformed cups 10 having longitudinal recesses 20.

**[0035]** Many features of the sidewall 18 increase the strength and rigidity of the sidewall 18, allowing the sidewall 18 to be made thinner, thereby potentially reducing weight and cost. Using a thickened, rolled rim 14, annular ribs 24, 28, and annular shoulders 22 to increase strength and rigidity is known in the art. The present invention achieves greater strength and rigidity through the use of recesses 20 in the sidewall 18, as well as these known means. Longitudinal recesses 20 help to increase rigidity by disrupting the energy transferred to the sidewall 18 by the outside force, in this case, the user's hand. By disrupting the transferred energy and preventing it from flowing through the sidewall 18, the recesses 20 limit the area of the sidewall 18 that "gives" in response to the force, thereby increasing strength and rigidity. It was discovered that longitudinal recesses 20, such as those used in the present invention, provide more strength enhancement if they are concave and arcuately formed. Thus, the longitudinal recesses 20 of the preferred cup 10 are concave and arcuately formed.

**[0036]** Improved strength and structural integrity resists deflection of a container inward, which may constrict the volume of the container causing unpleasant fluid overflows. In demonstrating the improved strength and structural integrity of the present invention and its embodiments, a sidewall 18 deflection analysis was performed and compared to that of a standard round thermoformed cup. These containers differ negligibly in thermoplastic thickness and are generally evaluated to be from 10 mils to 40 mils. The results from this analysis were obtained via a standardized procedure in the field of thermoformed containers. This procedure is described below with its corresponding results illustrated in Tables I and II.

**[0037]** The materials preferred for this standardized procedure include (1) several standard round thermoformed cups, (2) several cups identified herein as the preferred embodiment of the present invention, having longitudinal recesses 20, (3) a Chatillon® DFGS digital force gauge, (4) a Chatillon® TCD-200 tension and compression tester, (5) a container rigidity fixture and (6) Chatillon® AutoTest™ software.

**[0038]** This standardized procedure involves apparatus set-up and analysis. Specifically, (1) attaching the container rigidity fixture to the compression tester in a level manner, (2) aligning the container mounting fixture to permit test deflection at two-thirds the height of a container, which is the most commonly grasped area during use, (3) zeroing the appropriate gauges, (4) setting the deflection limit at one quarter inch, and (5) setting the travel speeds of the deflection apparatus. Moreover, analyzing sidewall 18 deflection includes (1) placing a first sample into the container mounting fixture, (2) slowly lowering the probe of the force gauge onto the samples, and (3) reading and recording the maximum force value on the gauge as the sidewall 18 of the sample deflects one quarter inch, the limit for deflection. This procedure is duplicated as necessary for analysis and study. It should be noted that the testing illustrated herein was performed on a thermoformed cup having a nominal capacity of 18 oz. While containers of different sizes might test differently, similar results are expected for containers of other common sizes.

**[0039]** Table I includes the data obtained by testing the deflection at Point A, shown in Figure 3. Point A is located on the bare portion of the sidewall 18, at a point two-thirds the height of the cup 10 and intermediate between the two recesses 20. The "mean container weight" reflects the average weight of both sets of containers. Similarly, the "mean container force" reflects the average force at which the container sidewall 18 deflected one quarter inch. These two quantities determine the "ratio" which is merely the mean container force divided by the mean container weight. Finally, the "ratio change" illustrates the improvement in force-to-weight ratio achieved by the present invention.

Table I: Point A on Sidewall

Container Type	Mean Container Weight	Mean Container Force	Ratio	Ratio Change
Standard	0.462 oz.	16.2 oz.	35.1	N/A
Embodiments	0.473 oz.	17.4 oz.	36.8	1.7

**[0040]** This data reflects a noticeable improvement in structural integrity on the main body of the sidewall 18 of the cup 10 of the present invention. The present invention creates a 4.8% increase in the force-to-weight ratio, as compared to a standard cup:

$$(1.7 \div 35.1) \times 100\% = 4.8\%$$

Therefore, containers utilizing the disclosed construction, including alternative embodiments, will offer a general increase in strength and structural integrity at any point on the sidewall 18. Depending on the specific features of the cup 10 (especially the number, size, location, and depth of the recesses 20) and the location of the test point, this increase in strength may vary from a slightly smaller increase (3-4%) to much larger increase.

**[0041]** The most marked increase in structural integrity occurs within the recesses 20 themselves. Table II includes the data obtained by testing the deflection at Point B, shown in Figure 2. Point B is located within one of the longitudinal recesses 20 on the sidewall 18, at a point two-thirds the height of the cup 10 and on the centerline of the recess 20. The structural integrity of the sidewall 18 in the recesses 20 is more critical, as the cup 10 is designed so the user's hand exerts pressure on the recesses 20 when gripping the cup 10.

Table II: Point B in Recess

Container Type	Mean Container Weight	Mean Container Force	Ratio	Ratio Change
Standard	0.462 oz.	16.3 oz.	35.3	N/A
Embodiments	0.473 oz.	24.0 oz.	50.7	15.4

**[0042]** This data clearly reflects a significant improvement in structural integrity for the present invention. The present invention and its embodiments demonstrate a significant improvement in structural integrity as evidenced by a 43.6% increase in the force-to-weight ratio:

$$(15.4 \div 35.3) \times 100\% = 43.6\%$$

Therefore, containers utilizing the disclosed construction, including alternative embodiments, will offer a dramatic increase in strength and structural integrity in the recesses 20, as compared to a container without recesses 20. Again, depending on the features of the sidewall 18, especially the features of the recesses 20, this strength increase may be smaller or larger.

**[0043]** The recesses 20 have the further benefit of providing an ergonomic gripping surface for a user to grip the cup 10, an advantage over more rounded designs. The contoured surface created by the recesses 20 comfortably accommodates a variety of hand positions. Additionally, the recesses 20 promote gripping by the fingertips, creating a minimal area of contact between the fingertips and the cup 10. This may be beneficial in limiting heat transfer between the cup 10 and the user's hand when an uncomfortably cold beverage is held in the cup 10. Further, as described above, the recesses 20 are smooth and arcuately formed, creating a comfortable feel when gripped. However, the recesses 20 may also incorporate ridges or other friction-enhancing structures to reduce slippage when the cup 10 is gripped. Finally, it is beneficial that the recesses 20 provide the most comfortable points for gripping the container, because they are the strongest portions of the sidewall 18, as discussed above.

**[0044]** The arched portions 23 of the annular shoulder 22 and the beveled portions 27 of the lower portion 26 provide the additional benefit of stabilizing the cup 10 when it is in the hand of the user. Such a means for stabilizing the cup 10



when it is held by a user is desirable to increase the commercial appeal of the cup 10. The arched portion 23 can be used to increase stability by the user placing a fingertip underneath the arched portion 23 when holding the cup 10. When the fingertip (preferably the pinky or ring finger) is underneath the arched portion 23, the annular shoulder 22 sits on top of the fingertip, allowing the fingertip to exert both vertical force and rotational leverage on the annular shoulder 22. The beveled portion 27 provides a contact surface for the fingertip, further increasing the stability of the cup 10. These features allow the user to secure a better grip on the cup 10, as well as maintain greater control over the cup 10, especially when the user slips or is accidentally bumped, such as at a crowded party.

**[0045]** The present invention may be embodied in any one of a vast number of container configurations, limited only by the scope of the Claims.

**[0046]** The container shown in Figures 14-19, is generally a thermoformed drinking cup including an open top 112 defined by a circular, annular rim 114, a base 116, and a sidewall 118 extending between the top 112 and the base 116. Like the preferred embodiment, the sidewall 118 has two longitudinal, arcuately formed recesses 120, an annular shoulder 122 located between the recesses 120 and the base 116, and three annular ribs 124, 128. This embodiment includes a lower portion 126 extending between the annular shoulder 122 and the base 116 and having two beveled portions 127 aligned with the longitudinal recesses 120, with the recesses 120 terminating at the annular shoulder 122. One key difference is the absence of arched portions in the annular shoulder 122. A second key difference is the generally elliptical shape of the base 116, the base recess 132, the lower portion 126, and the annular shoulder 122, as opposed to the circular shape of the preferred embodiment. This elliptical shape has two benefits. The first is that it increases strength and rigidity in the recesses 120 by decreasing the radius of curvature near the recesses 120. The second benefit is that, as discussed above, the elliptical shape is another means of ensuring proper nesting.

**[0047]** The container shown in Figures 20-23, is also generally a thermoformed drinking cup 210 including an open top 212 defined by an annular rim 214, a circular base 216 having a circular base recess 232, and a sidewall 218 extending between the top 212 and the base 216. The sidewall 218 of this embodiment includes a lower portion 226 extending between the annular shoulder 222 and the base 216 and three annular ribs 224, 228, and the recesses 220 terminate at the annular shoulder 222. The key difference is that the sidewall 218 includes a larger number of arcuately formed longitudinal recesses 220. The number of longitudinal recesses 220 is generally in the range of from 2 to 12, but is preferably 12, as in Figure 22. In another embodiment, the cup 10 has as many as twenty recesses 20. However, the potential number of recesses 20 is not limited by the scope of the present invention unless expressly limited, and is only limited by technology and practicality. Most importantly, the optimal number of recesses depends on the size of the container and the width of the recesses. Preferably, the annular shoulder 222 of this embodiment has no arched portions and the lower portion 226 has no beveled portions.

**[0048]** The large number of longitudinal recesses 220 is beneficial for three reasons. The first reason is the great degree of strength and integrity imparted on the sidewall 218 by the presence of the large number of recesses 220. The closely spaced recesses 220 disrupt any energy transferred to the sidewall 218 so quickly that the sidewall 218 "gives" very little to pressure at any location. The second reason is the ergonomic versatility created by the recesses 220, giving the user a large number of possible positions for holding the cup 210. The third reason, as explained above, is that using a large number of recesses 220 in a thin-walled container is an effective means for ensuring proper nesting of the containers upon each other.

**[0049]** The present invention was developed primarily for use in thermoformed drinking cups. However, the principles of the present invention are beneficial when applied to a multitude of other types of containers. Drinking cups made of any type of polymer, such as clear, opaque, or colored plastics or foam materials may be used in accordance with the present invention, as may cups made of non-polymeric materials. Many types of containers other than cups may also benefit from use of the disclosed features.

**[0050]** Although specific embodiments have been illustrated and described, numerous modifications are possible. Accordingly, the scope of this patent is solely limited by the scope of the accompanying claims.

## Claims

1. A container (10) having an open top (12) defined by an annular rim (14), a base (16), and a sidewall (18) extending between the top (12) and the base (16), the sidewall (18) having an inner surface (40) and an outer surface (42); **characterized in that** the sidewall (18) comprises a recess (20) and an annular shoulder (22) located between the recess (20) and the base (16), the annular shoulder (22) comprising an arched portion (23), wherein the annular shoulder (22) forms an inner stacking surface on the inner surface (40) of the sidewall (18) and the arched portion (23) forms a raised ledge (44) on the inner stacking surface, and wherein on nesting a second identical container (10) within the container (10), the base (16) of the second identical container (10) rests upon the inner stacking surface and the raised ledge (44) sits within the arched portion (23) of the second identical container (10).

2. The container (10) of Claim 1 wherein the annular shoulder (22) further comprises a means for stabilizing the container (10) when the container (10) is held by a user.
3. The container (10) of Claim 1 wherein the recess (20) terminates at the annular shoulder (22).
4. The container (10) of Claim 1 wherein the sidewall (18) further comprises an annular rib (24).
5. The container (10) of Claim 1 wherein the sidewall (18) further comprises multiple annular ribs (24), at least one of the annular ribs (24) comprising a curved portion (25) aligned with the recess (20).
6. The container (10) of Claim 1 wherein the recess (20) is longitudinal and arcuately formed.
7. The container (10) of Claim 1 further comprising a measurably improved strength to weight ratio over a substantially similar sidewall (18) having no recesses (20).
8. The container (10) of Claim 1 further comprising an improved strength to weight ratio of at least 3% over a substantially similar sidewall (18) having no recesses (20).
9. The container (10) of Claim 1 further comprising an improved strength to weight ratio of at least 20% over a substantially similar sidewall (18) having no recesses (20).
10. The container (10) of Claim 1 further comprising an improved strength to weight ratio of at least 40% over a substantially similar sidewall (18) having no recesses (20).
11. The container (10) of Claim 1 wherein the sidewall (18) further comprises a lower portion (26) extending between the annular shoulder (22) and the base (16), the lower portion (26) comprising a beveled portion (27) aligned with the recess (20).
12. The container (10) of Claim 1 wherein the sidewall (18) further comprises a lower portion (26) extending between the annular shoulder (22) and the base (16), the lower portion (26) comprising a beveled portion (27) aligned with the arched portion (23).
13. The container (10) of Claim 1 wherein the base (16) is substantially circular and defined by an outermost edge (34) of the lowermost surface of the container (10), and the sidewall (18) further comprises a lower portion (26) extending between the annular shoulder (22) and the base (16), wherein at least a portion of the lower portion (26) is tapered outwardly from the annular shoulder (22) to the base (16), the lower portion (26) further comprising a beveled portion (27) extending from the arched portion (23) of the annular shoulder (22) to the base (16), the beveled portion (27) forming a beveled edge portion (30) on said outermost edge defining the base (16).
14. The container (10) of Claim 13 wherein the recess (20) is longitudinal and not aligned with the arched portion (23).
15. The container (10) of Claim 13 wherein said beveled edge portion (30) is positioned radially inward of an outermost circumference of the substantially circular base (16).
16. The container (10) of Claim 1 wherein the recess (20) comprises a means for enhancing gripping of the container (10) by a user.
17. The container (10) of Claim 1 wherein the recess (20) terminates at the annular shoulder (22).
18. The container (10) of Claim 1 wherein the annular shoulder (22) is located proximate the base (16).
19. The container (10) of Claim 1 wherein the sidewall (18) further comprises a lower portion (26) extending between the annular shoulder (22) and the base (16), wherein at least a portion of the lower portion (26) is tapered outwardly from the annular shoulder (22) to the base (16).

## Patentansprüche

- 5 1. Behälter (10), der ein durch einen ringförmigen Rand (14) definiertes offenes oberes Ende (12), einen Boden (16) und eine Seitenwand (18), die sich zwischen dem oberen Ende (12) und dem Boden (16) erstreckt, aufweist, wobei die Seitenwand (18) eine innere Oberfläche (40) und eine äußere Oberfläche (42) hat;  
**dadurch gekennzeichnet, dass** die Seitenwand (18) eine Aussparung (20) und einen zwischen der Aussparung (20) und dem Boden (16) angeordneten ringförmigen Absatz (22) umfasst, wobei der ringförmige Absatz (22) einen bogenförmigen Abschnitt (23) umfasst und eine innere Stapeloberfläche auf der inneren Oberfläche (40) der Seitenwand (18) bildet, und der bogenförmige Abschnitt (23) einen erhöhten Vorsprung (44) auf der inneren Stapeloberfläche bildet, und wobei, wenn ein zweiter identischer Behälter (10) in den Behälter (10) gesteckt wird, der Boden (16) des zweiten identischen Behälters (10) auf der inneren Stapeloberfläche ruht und der erhöhte Vorsprung (44) innerhalb des bogenförmigen Abschnitts (23) des zweiten identischen Behälters (10) sitzt.
- 10 2. Behälter (10) nach Anspruch 1, bei dem der ringförmige Absatz (22) weiter ein Mittel zur Stabilisierung des Behälters (10), wenn der Behälter (10) von einem Benutzer gehalten wird, umfasst.
- 15 3. Behälter (10) nach Anspruch 1, bei dem die Aussparung (20) an dem ringförmigen Absatz (22) aufhört.
- 20 4. Behälter (10) nach Anspruch 1, bei dem die Seitenwand (18) weiter eine ringförmige Rippe (24) umfasst.
- 5 5. Behälter (10) nach Anspruch 1, bei dem die Seitenwand (18) weiter mehrere ringförmige Rippen (24) umfasst, von denen zumindest eine einen gekrümmten Abschnitt (25) umfasst, der nach der Aussparung (20) ausgerichtet ist.
- 25 6. Behälter (10) nach Anspruch 1, bei dem die Aussparung (20) längslaufend und bogenförmig ausgebildet ist.
7. Behälter (10) nach Anspruch 1, der weiter ein messbar verbessertes Festigkeits-Gewichts-Verhältnis gegenüber einer im Wesentlichen ähnlichen Seitenwand (18), die keine Aussparungen (20) aufweist, umfasst.
- 30 8. Behälter (10) nach Anspruch 1, der weiter ein verbessertes Festigkeits-Gewichts-Verhältnis von mindestens 3% gegenüber einer im Wesentlichen ähnlichen Seitenwand (18), die keine Aussparungen (20) aufweist, umfasst.
- 35 9. Behälter (10) nach Anspruch 1, der weiter ein verbessertes Festigkeits-Gewichts-Verhältnis von mindestens 20% gegenüber einer im Wesentlichen ähnlichen Seitenwand (18), die keine Aussparungen (20) aufweist, umfasst.
- 40 10. Behälter (10) nach Anspruch 1, der weiter ein verbessertes Festigkeits-Gewichts-Verhältnis von mindestens 40% gegenüber einer im Wesentlichen ähnlichen Seitenwand (18), die keine Aussparungen (20) aufweist, umfasst.
- 45 11. Behälter (10) nach Anspruch 1, bei dem die Seitenwand (18) weiter einen unteren Abschnitt (26) umfasst, der sich zwischen dem ringförmigen Absatz (22) und dem Boden (16) erstreckt, wobei der untere Abschnitt (26) einen abgeschrägten Abschnitt (27) umfasst, der nach der Aussparung (20) ausgerichtet ist.
- 50 12. Behälter (10) nach Anspruch 1, bei dem die Seitenwand (18) weiter einen unteren Abschnitt (26) umfasst, der sich zwischen dem ringförmigen Absatz (22) und dem Boden (16) erstreckt, wobei der untere Abschnitt (26) einen abgeschrägten Abschnitt (27) umfasst, der nach dem bogenförmigen Abschnitt (23) ausgerichtet ist.
- 55 13. Behälter (10) nach Anspruch 1, bei dem der Boden im Wesentlichen kreisförmig ist und durch einen äußersten Rand (34) der untersten Oberfläche des Behälters (10) definiert wird, und die Seitenwand (18) weiter einen unteren Abschnitt (26) umfasst, der sich zwischen dem ringförmigen Absatz (22) und dem Boden (16) erstreckt, wobei zumindest ein Teil des unteren Abschnitts (26) von dem ringförmigen Absatz (22) zu dem Boden (16) äußerlich konisch zulaufend ist, und der untere Abschnitt (26) weiter einen abgeschrägten Abschnitt (27) umfasst, der sich von dem bogenförmigen Abschnitt (23) des ringförmigen Absatzes (22) zu dem Boden (16) erstreckt, wobei der abgeschrägte Abschnitt (27) einen abgeschrägten Randabschnitt (30) auf dem äußersten Rand, der den Boden (16) definiert, bildet.
14. Behälter (10) nach Anspruch 13, bei dem die Aussparung (20) längslaufend und nicht nach dem bogenförmigen Abschnitt (23) ausgerichtet ist.
15. Behälter (10) nach Anspruch 13, bei dem der abgeschrägte Randabschnitt (30) radial einwärts eines äußersten

Umfangs des im Wesentlichen kreisförmigen Bodens (16) angeordnet ist.

16. Behälter (10) nach Anspruch 1, bei dem die Aussparung (20) ein Mittel zur Verbesserung des Greifens des Behälters (10) durch einen Benutzer umfasst.

17. Behälter (10) nach Anspruch 1, bei dem die Aussparung (20) an dem ringförmigen Absatz (22) aufhört.

18. Behälter (10) nach Anspruch 1, bei dem sich der ringförmige Absatz (22) nahe bei dem Boden (16) befindet.

19. Behälter (10) nach Anspruch 1, bei dem die Seitenwand (18) weiter einen unteren Abschnitt (26) umfasst, der sich zwischen dem ringförmigen Absatz (22) und dem Boden (16) erstreckt, wobei zumindest ein Teil des unteren Abschnitts (26) von dem ringförmigen Absatz (22) zu dem Boden (16) äußerlich konisch zulaufend ist.

## Revendications

1. Récipient (10) présentant une partie supérieure ouverte (12) définie par un rebord annulaire (14), une base (16) et une paroi latérale (18) s'étendant entre la partie supérieure (12) et la base (16), la paroi latérale (18) présentant une surface intérieure (40) et une surface extérieure (42) ;

**caractérisé en ce que** la paroi latérale (18) comprend un évidement (20) et un épaulement annulaire (22) situé entre l'évidement (20) et la base (16), l'épaulement annulaire (22) comprenant une partie en arc (23), dans lequel l'épaulement annulaire (22) forme une surface d'empilage intérieure sur la surface intérieure (40) de la paroi latérale (18) et la partie en arc (23) forme un rebord surélevé (44) sur la surface d'empilage intérieure, et dans lequel par emboîtement d'un deuxième récipient (10) identique dans le récipient (10), la base (16) du deuxième récipient (10) identique repose sur la surface d'empilage intérieure et le rebord surélevé (44) se trouve dans la partie en arc (23) du deuxième récipient (10) identique.

2. Récipient (10) selon la revendication 1, dans lequel l'épaulement annulaire (22) comprend en outre un moyen de stabilisation du récipient (10) lorsque le récipient (10) est tenu par un utilisateur.

3. Récipient (10) selon la revendication 1, dans lequel l'évidement (20) se termine au niveau de l'épaulement annulaire (22).

4. Récipient (10) selon la revendication 1, dans lequel la paroi latérale (18) comprend en outre une nervure annulaire (24).

5. Récipient (10) selon la revendication 1, dans lequel la paroi latérale (18) comprend en outre de nombreuses rainures annulaires (24), au moins une des nervures annulaires (24) comprenant une partie incurvée (25) alignée avec l'évidement (20).

6. Récipient (10) selon la revendication 1, dans lequel l'évidement (20) est longitudinal et en forme d'arc.

7. Récipient (10) selon la revendication 1, comprenant en outre un rapport solidité / poids amélioré de façon mesurable par rapport à une paroi latérale (18) sensiblement similaire ne présentant aucun évidement (20).

8. Récipient (10) selon la revendication 1, comprenant en outre un rapport solidité / poids amélioré d'au moins 3 % par rapport à une paroi latérale (18) sensiblement similaire ne présentant aucun évidement (20).

9. Récipient (10) selon la revendication 1, comprenant en outre un rapport solidité / poids amélioré d'au moins 20 % par rapport à une paroi latérale (18) sensiblement similaire ne présentant aucun évidement (20).

10. Récipient (10) selon la revendication 1, comprenant en outre un rapport solidité / poids amélioré d'au moins 40 % par rapport à une paroi latérale (18) sensiblement similaire ne présentant aucun évidement (20).

11. Récipient (10) selon la revendication 1, dans lequel la paroi latérale (18) comprend en outre une partie inférieure (26) s'étendant entre l'épaulement annulaire (22) et la base (16), la partie inférieure (26) comprenant une partie en biseau (27) alignée avec l'évidement (20).

**12.** Récipient (10) selon la revendication 1, dans lequel la paroi latérale (18) comprend en outre une partie inférieure (26) s'étendant entre l'épaulement annulaire (22) et la base (16), la partie inférieure (26) comprenant une partie en biseau (27) alignée avec la partie en arc (23).

5 **13.** Récipient (10) selon la revendication 1, dans lequel la base (16) est sensiblement circulaire et définie par un bord le plus extérieur (34) de la surface la plus inférieure du récipient (10) et la paroi latérale (18) comprend en outre une partie inférieure (26) s'étendant entre l'épaulement annulaire (22) et la base (16), dans lequel au moins une partie de la partie inférieure (26) est conique depuis l'extérieur de l'épaulement annulaire (22) vers la base (16), la  
10 partie inférieure (26) comprenant en outre une partie en biseau (27) s'étendant de la partie en arc (23) de l'épaulement annulaire (22) vers la base (16), la partie en biseau (27) formant une partie de bord en biseau (30) sur ledit bord le plus extérieur définissant la base (16).

**14.** Récipient (10) selon la revendication 13, dans lequel l'évidement (20) est longitudinal et n'est pas aligné avec la  
15 partie en arc (23).

**15.** Récipient (10) selon la revendication 13, dans lequel ladite partie de bord en biseau (30) est positionnée radialement vers l'intérieur d'une circonférence la plus extérieure de la base sensiblement circulaire (16).

20 **16.** Récipient (10) selon la revendication 1, dans lequel l'évidement (20) comprend un moyen permettant d'améliorer la saisie du récipient (10) par un utilisateur.

**17.** Récipient (10) selon la revendication 1, dans lequel l'évidement (20) se termine au niveau de l'épaulement annulaire (22).

25 **18.** Récipient (10) selon la revendication 1, dans lequel l'épaulement annulaire (22) est situé à proximité de la base (16).

**19.** Récipient (10) selon la revendication 1, dans lequel la paroi latérale (18) comprend en outre une partie inférieure (26) s'étendant entre l'épaulement annulaire (22) et la base (16), dans lequel au moins une partie de la partie  
30 inférieure (26) est conique vers l'extérieur depuis l'épaulement annulaire (22) vers la base (16).

35


40

45

50

55

FIG. 1

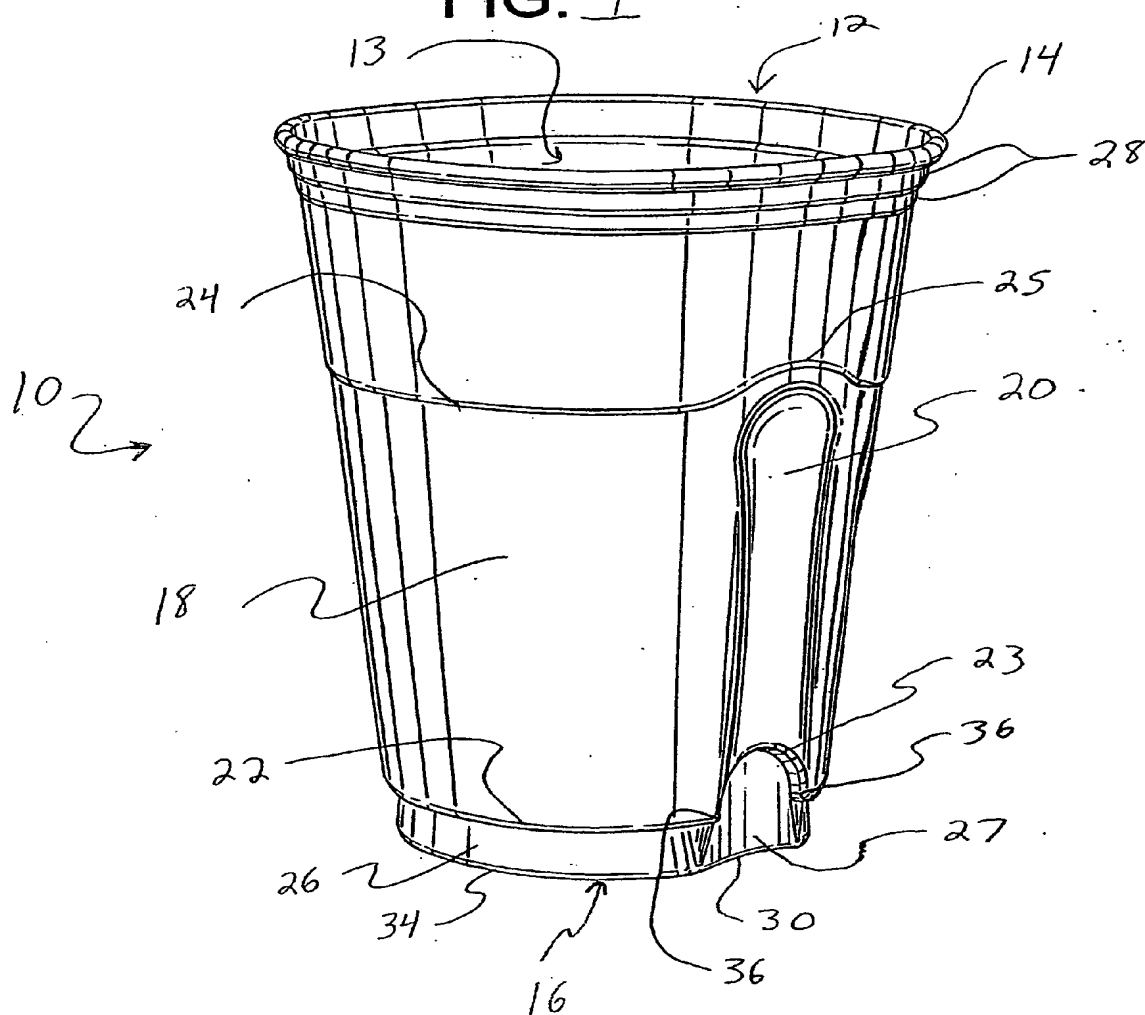

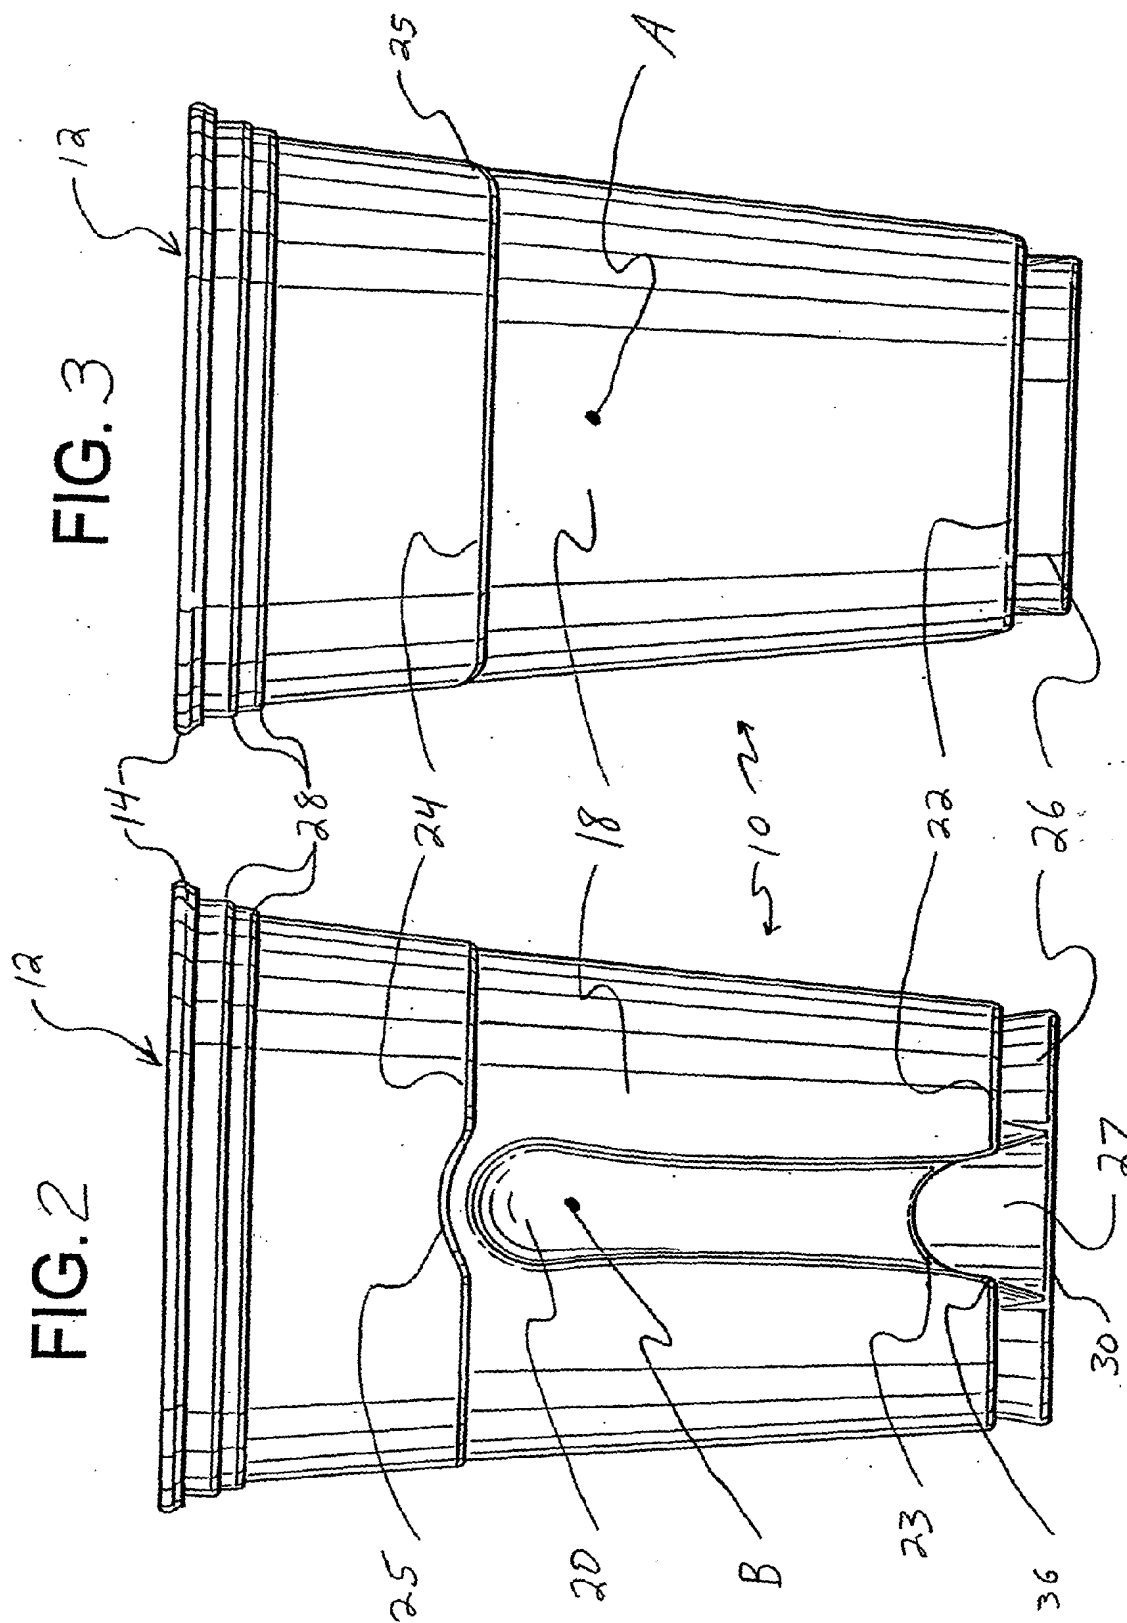


FIG. 4

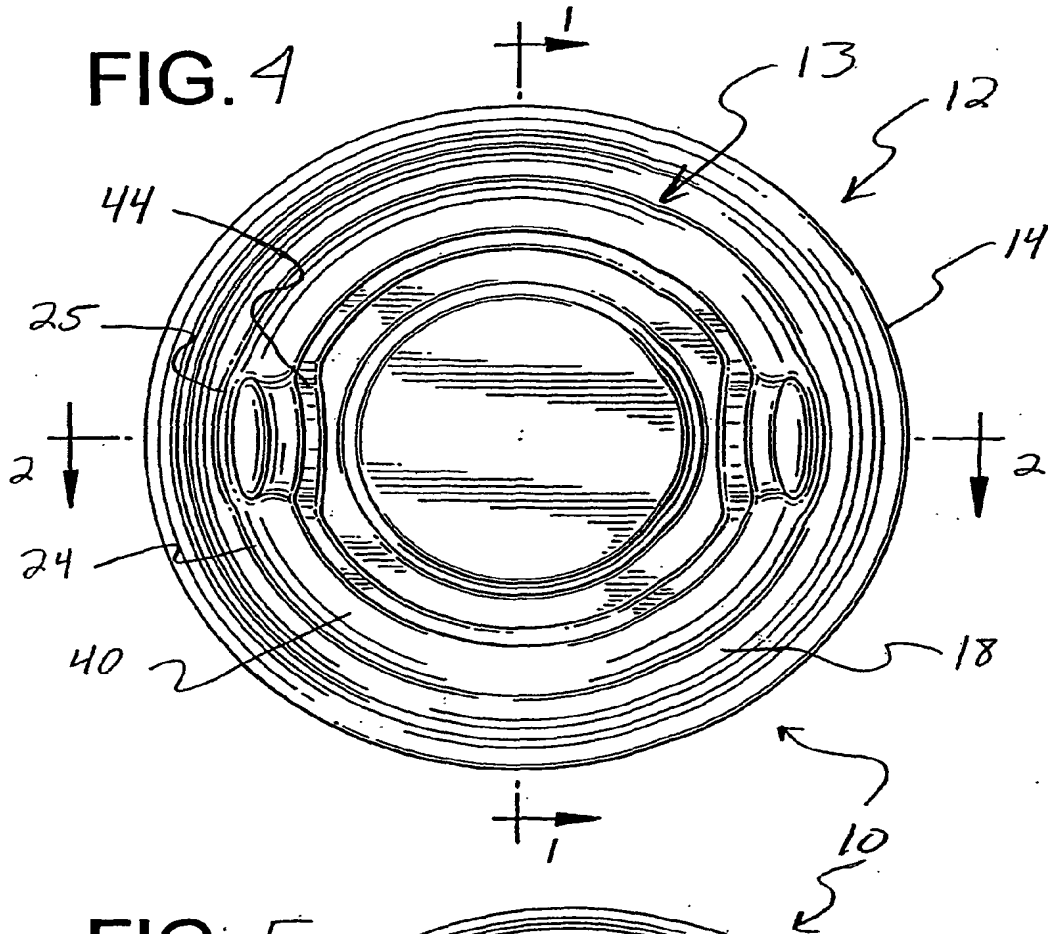
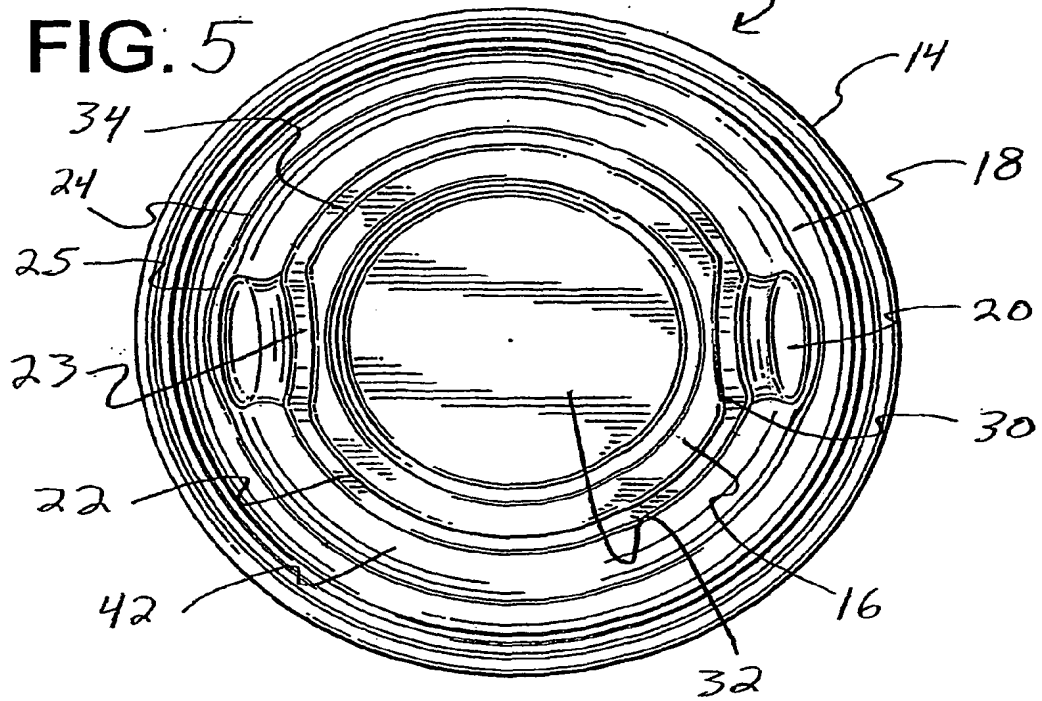


FIG. 5





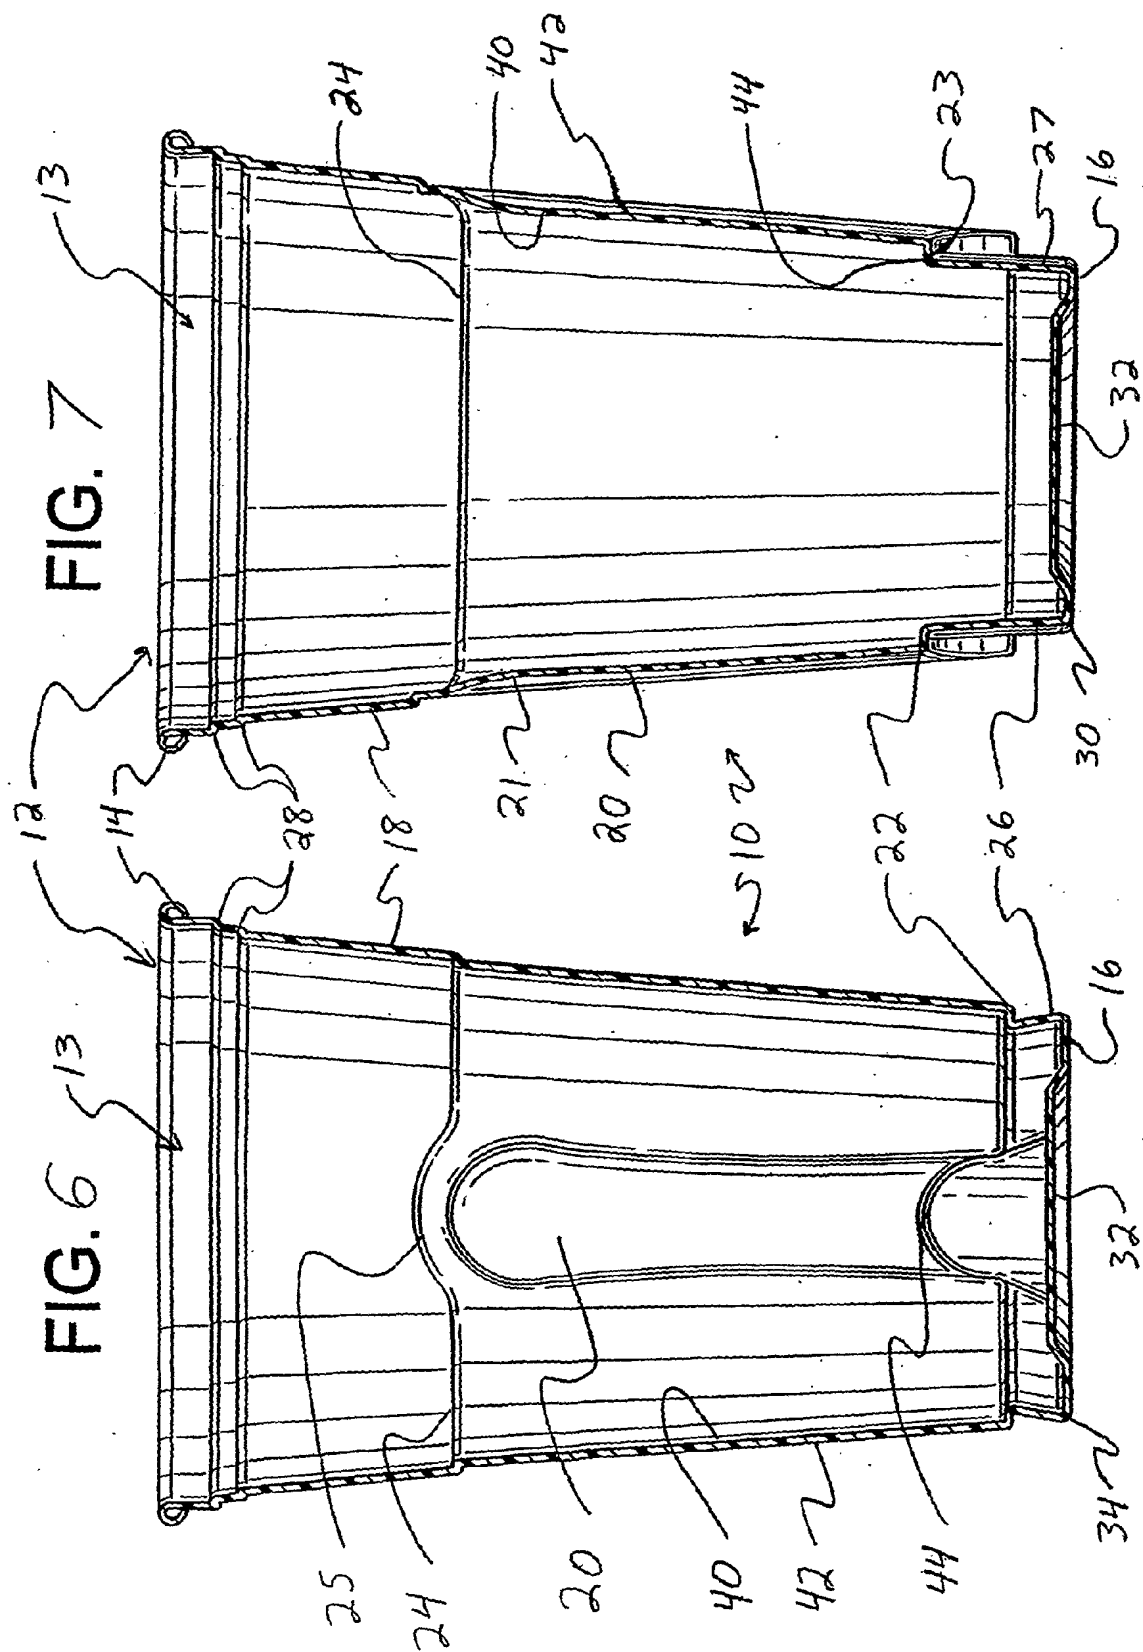


FIG. 8

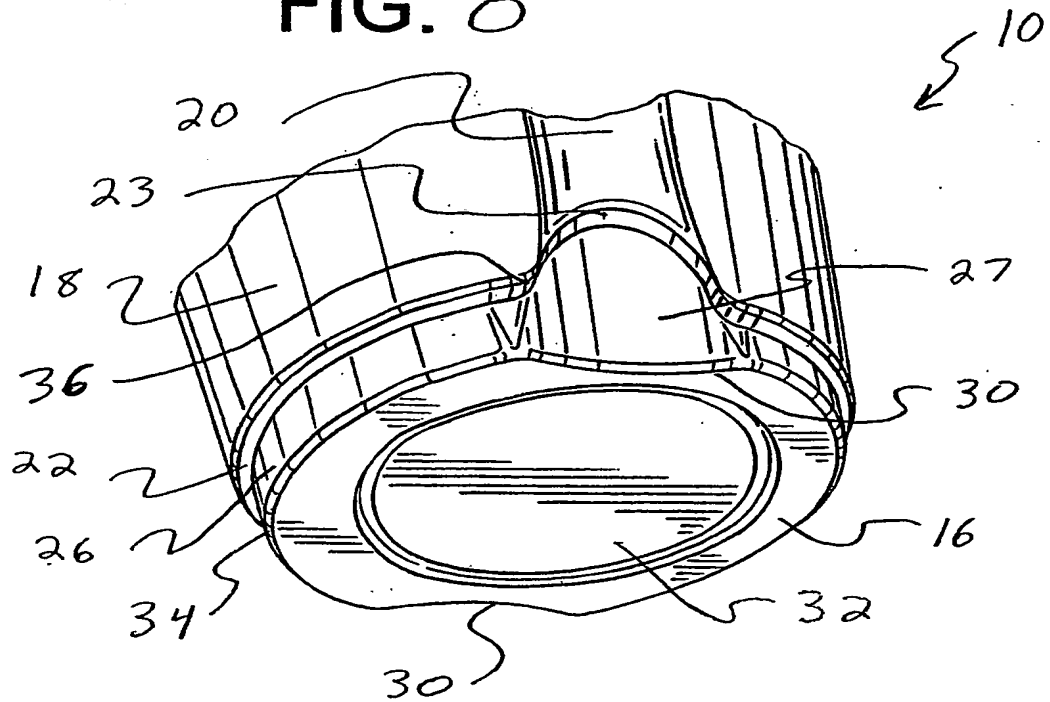
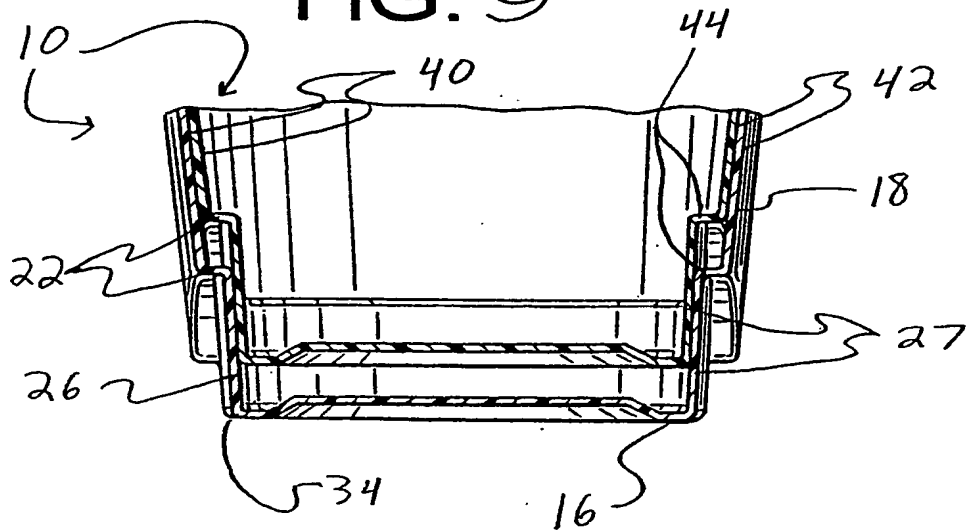


FIG. 9



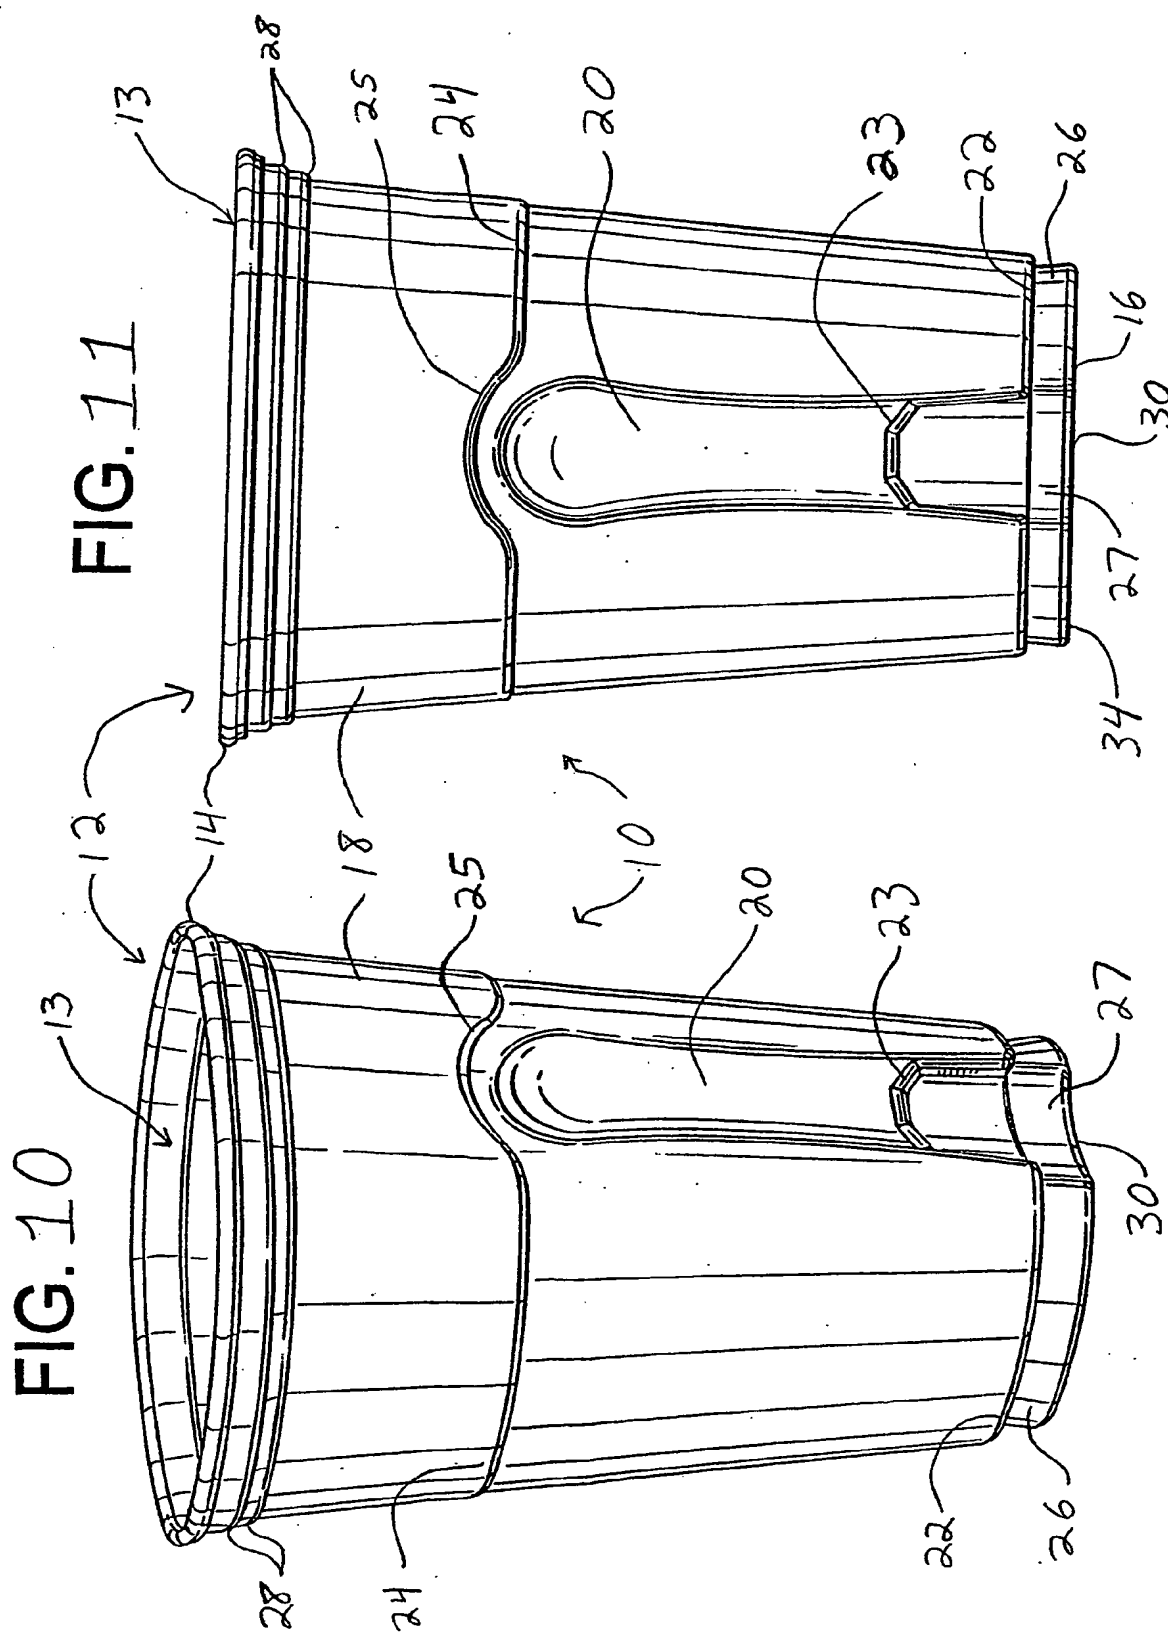


FIG. 12

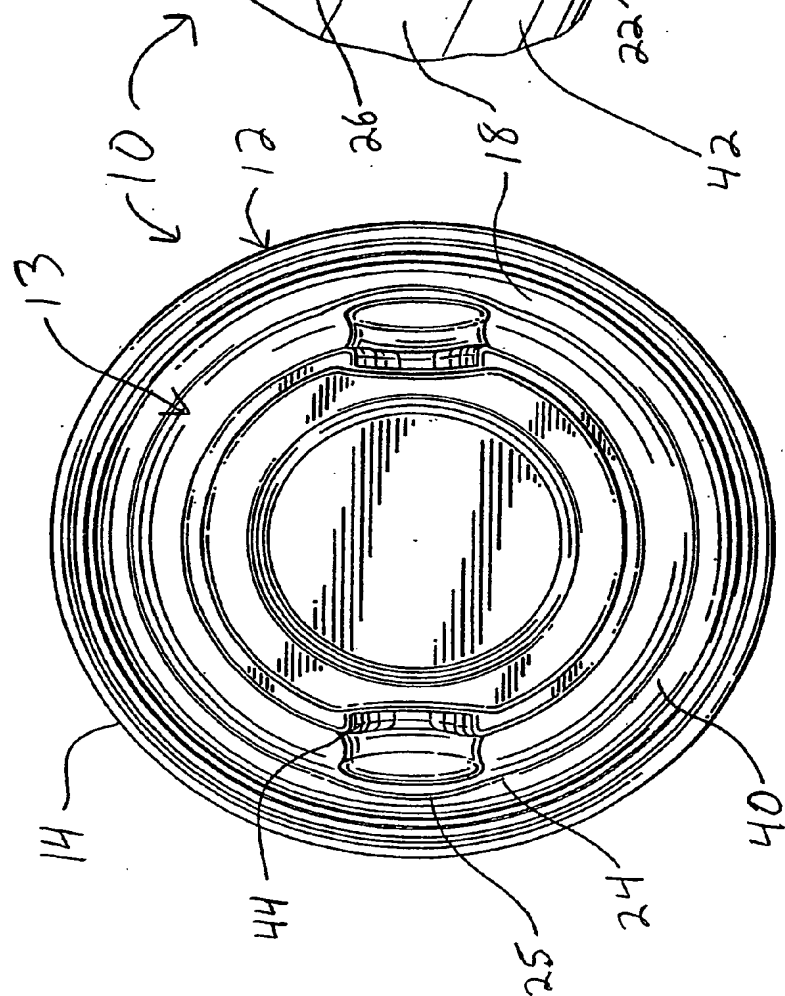
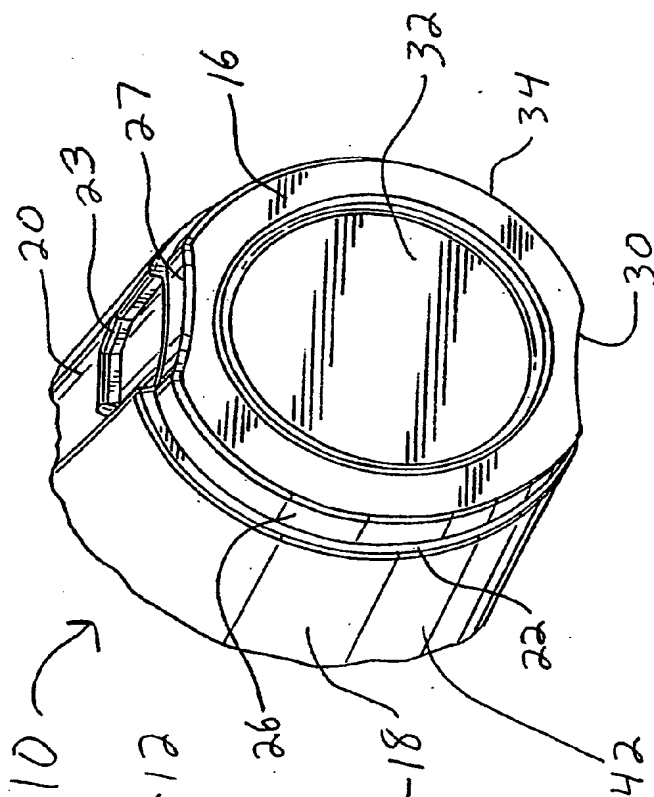
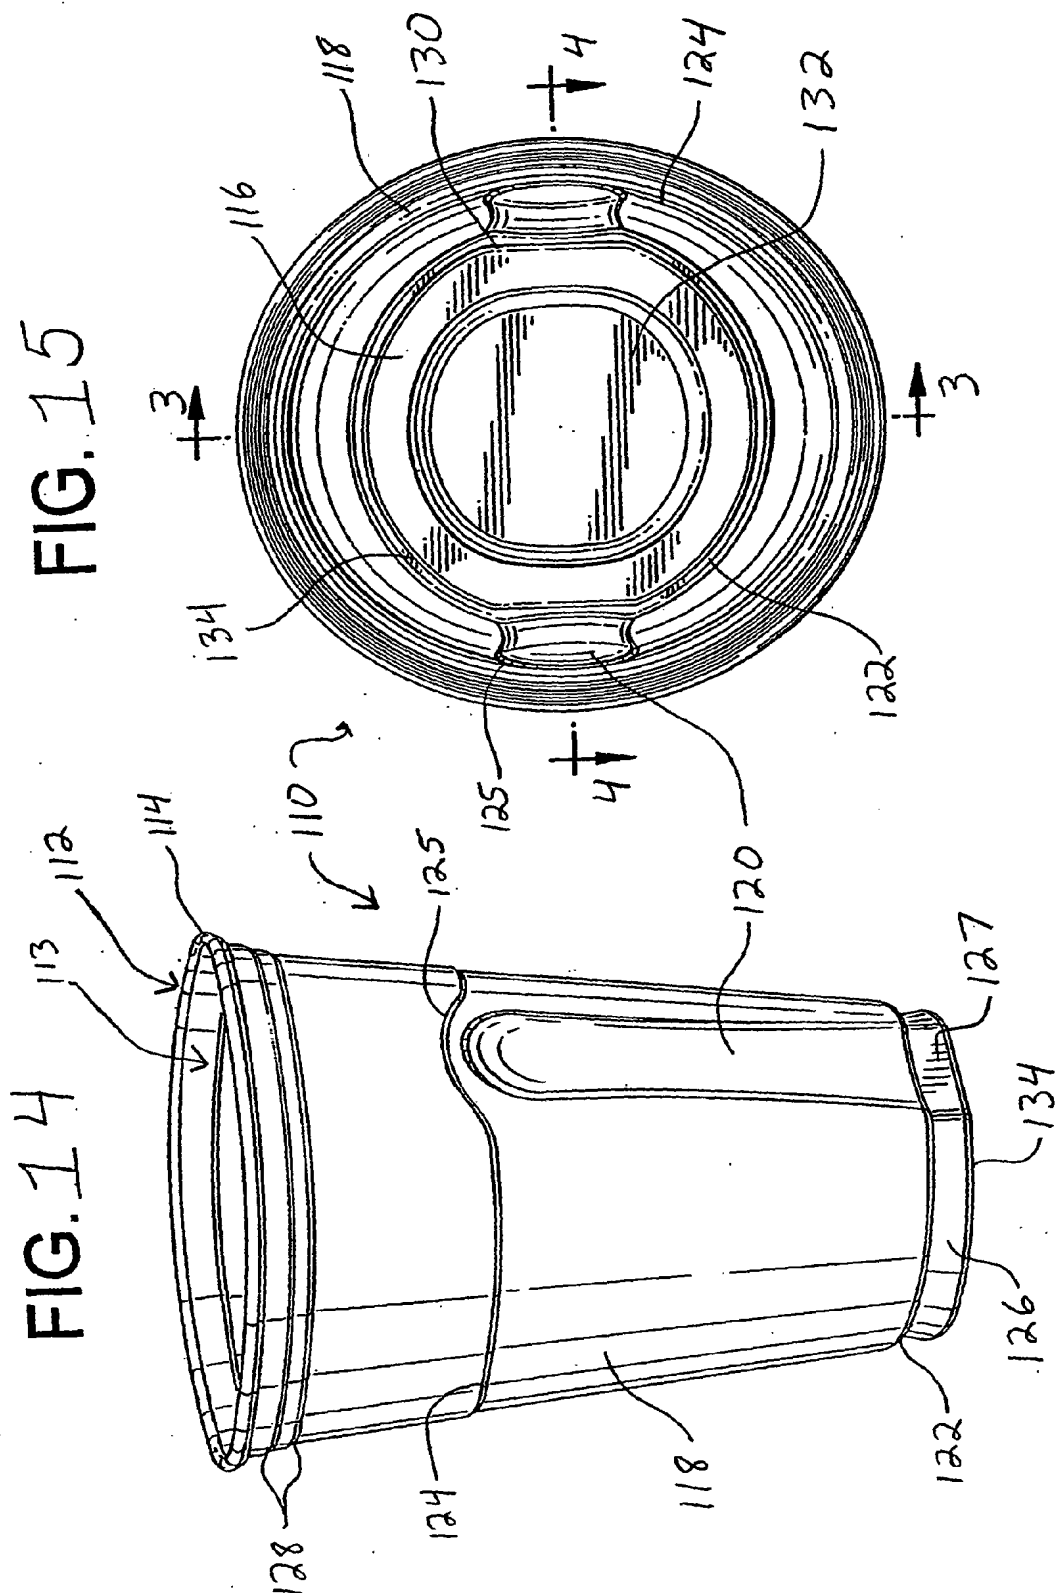
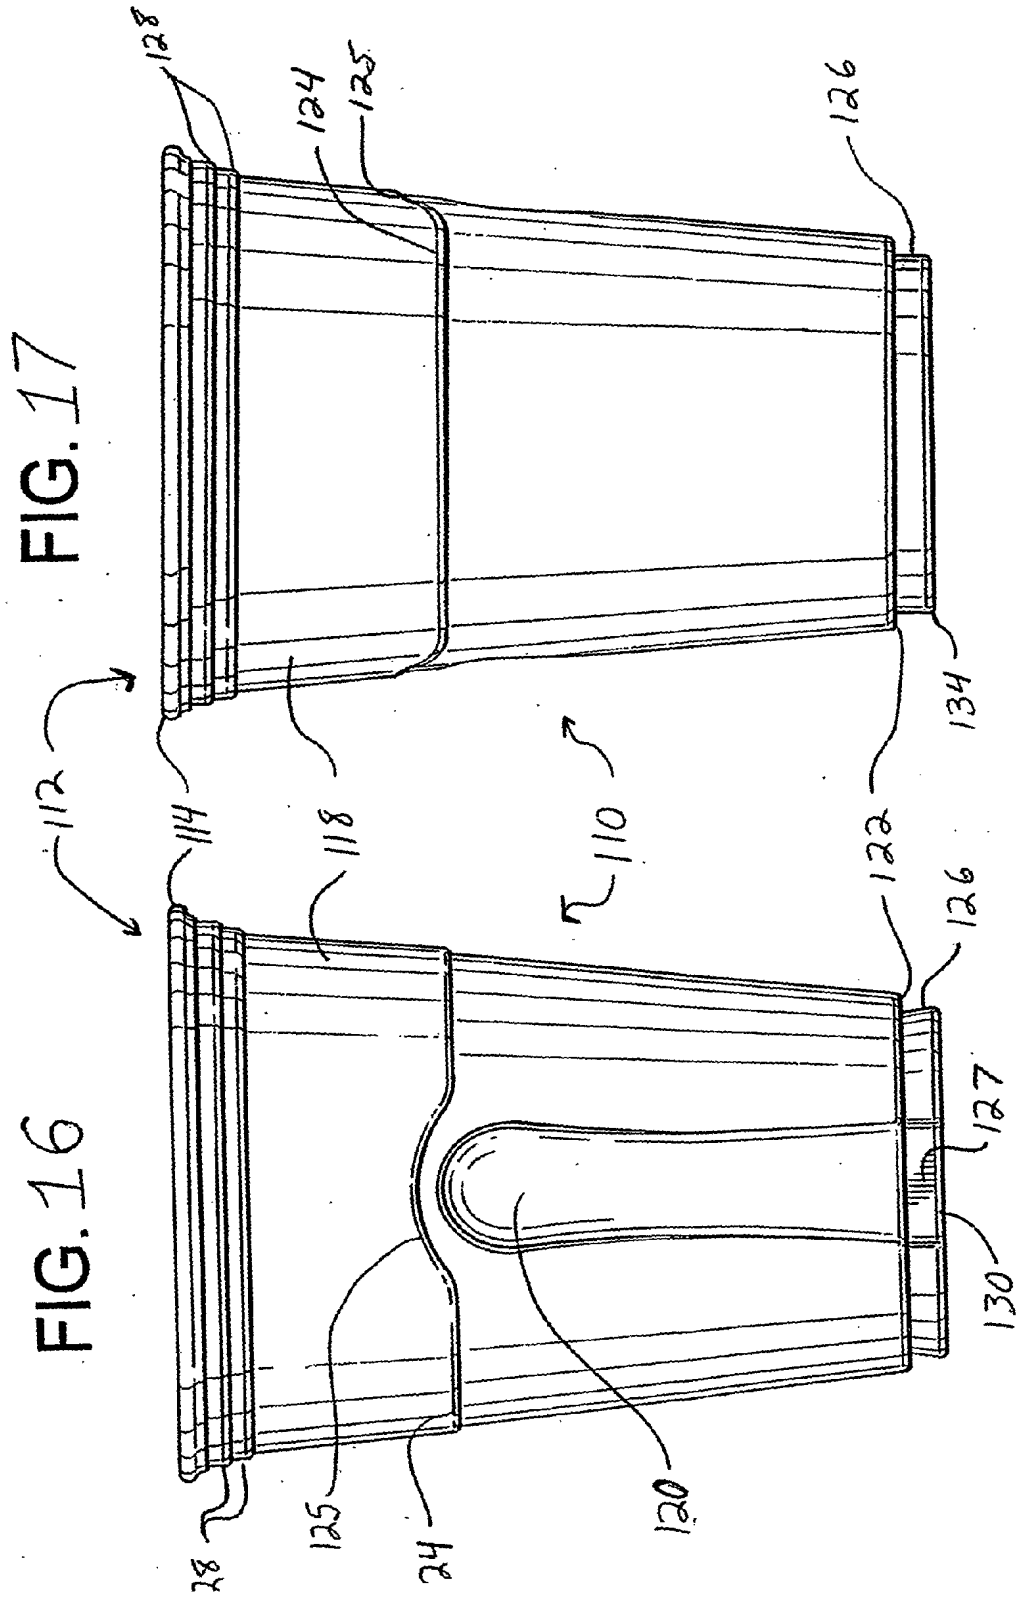
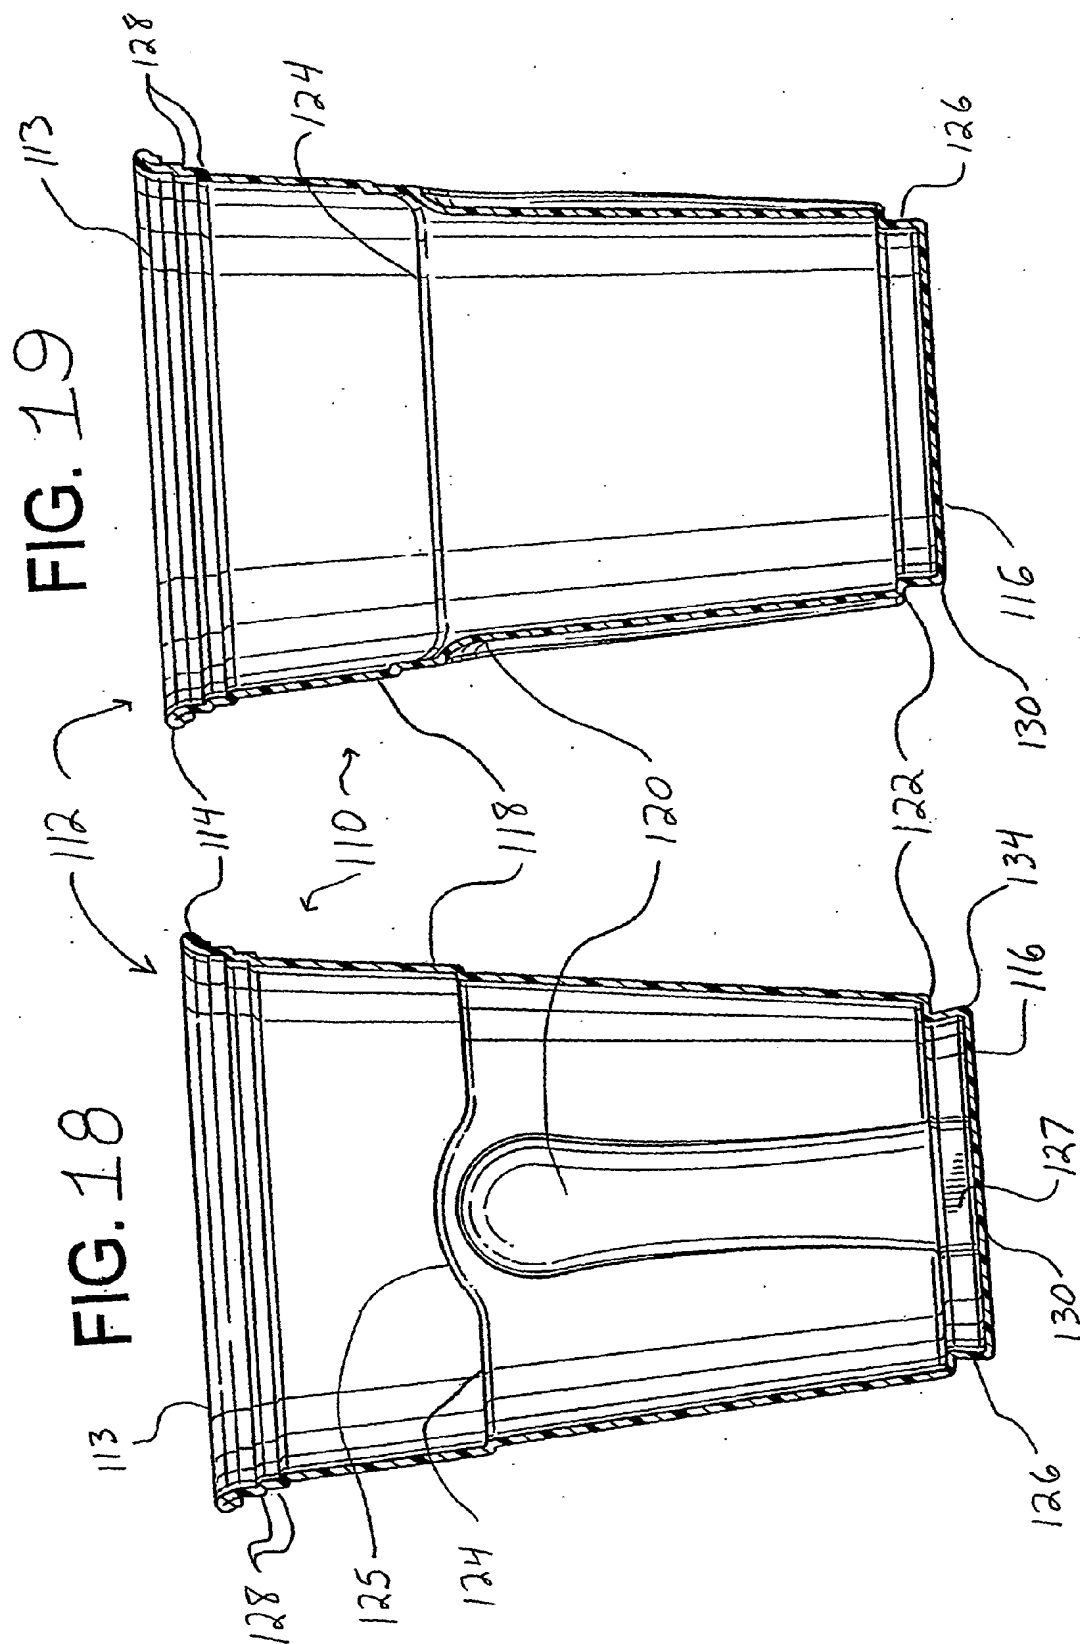


FIG. 13









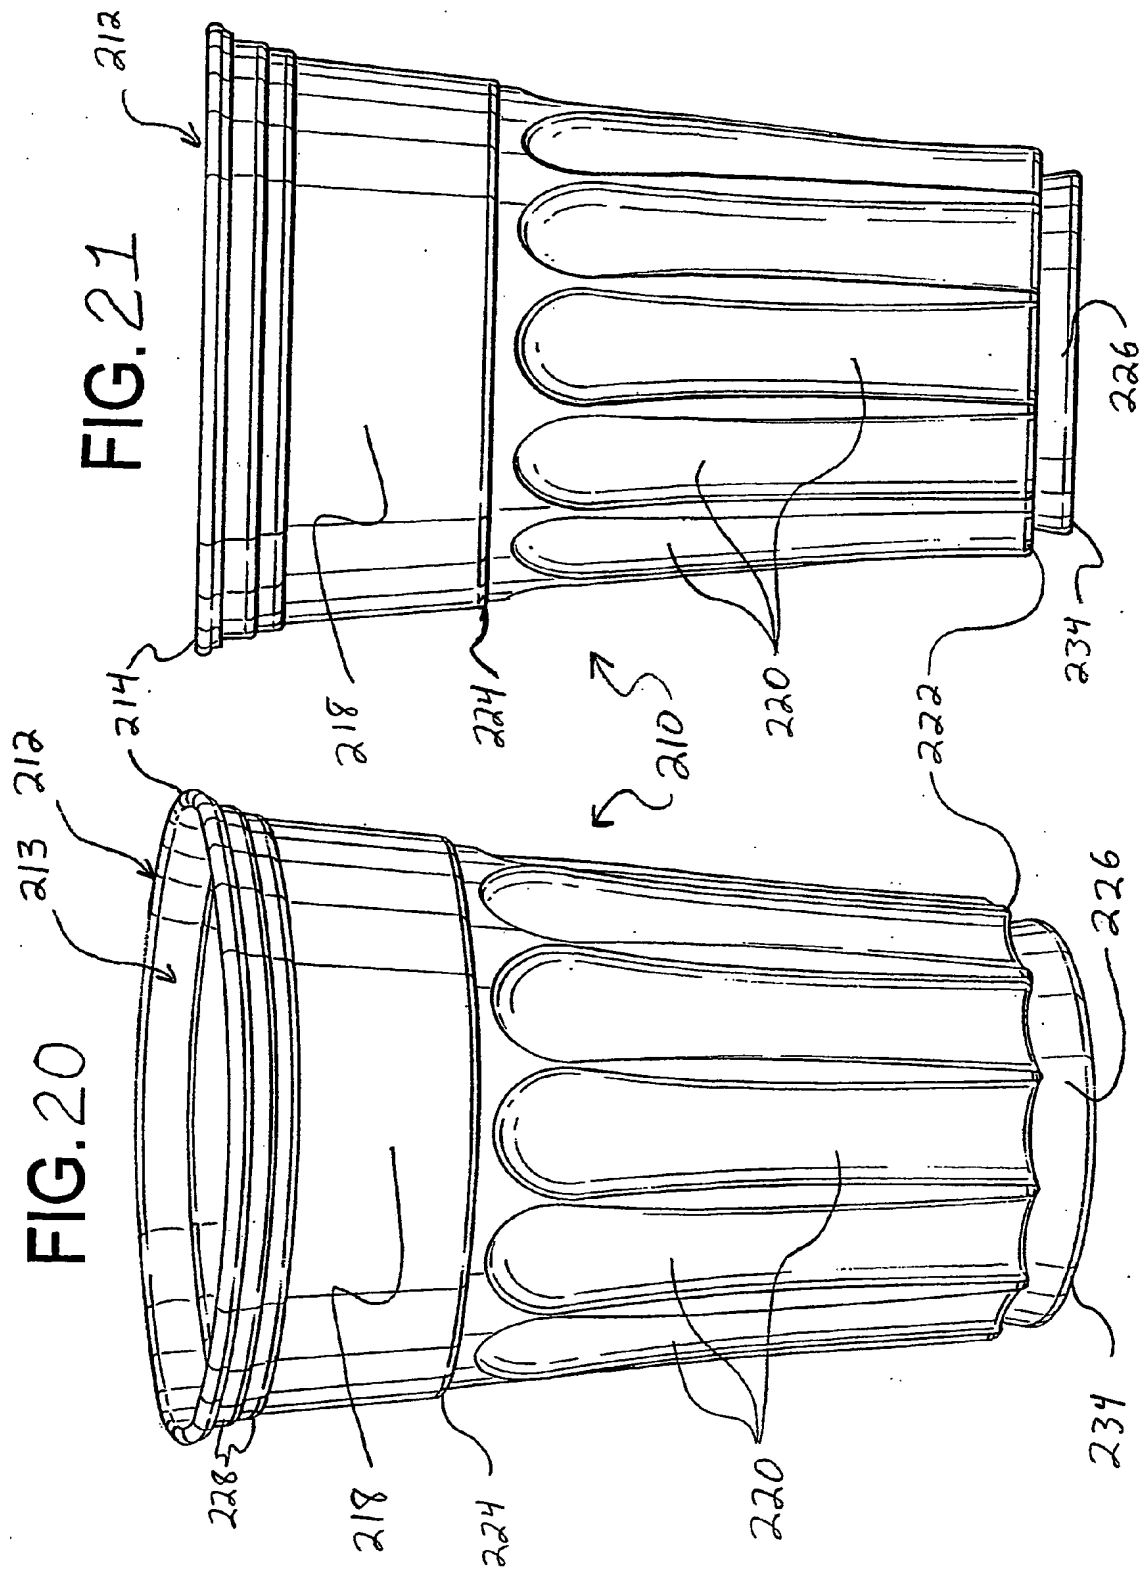




FIG. 23





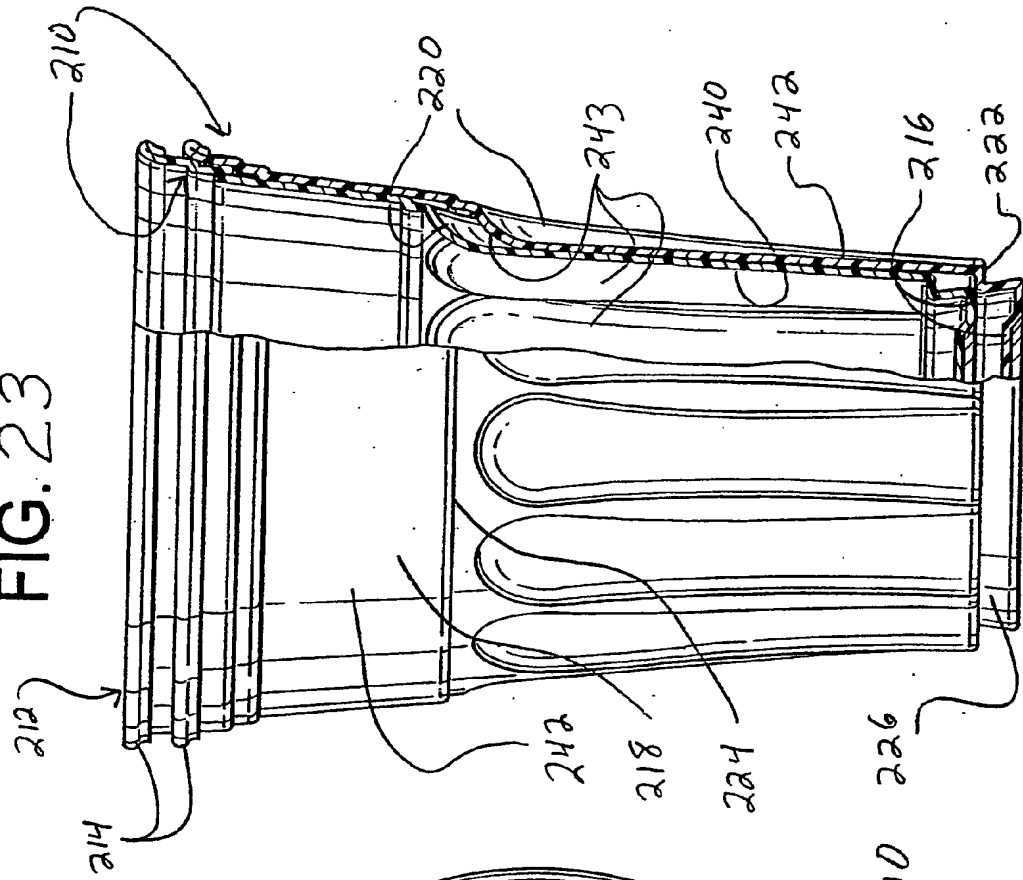


FIG. 22

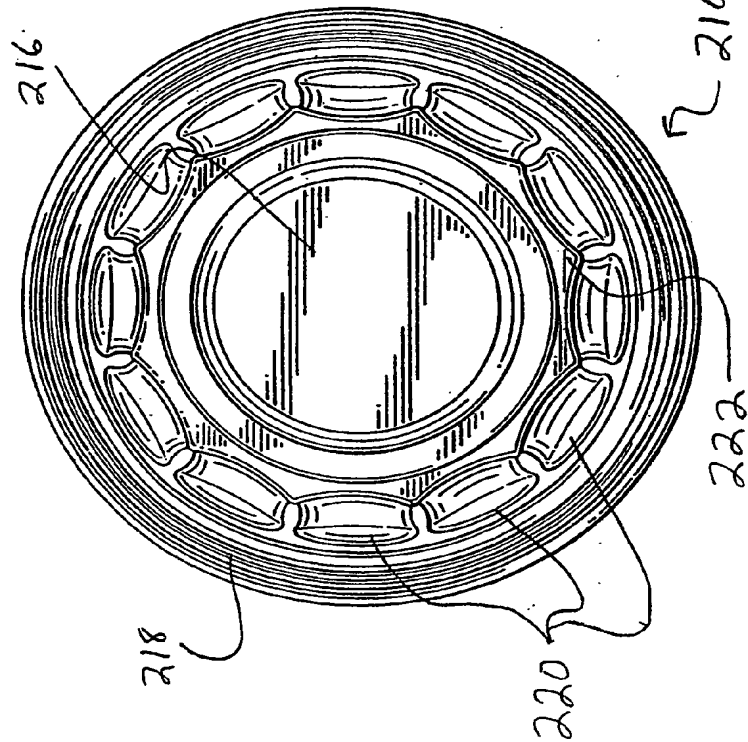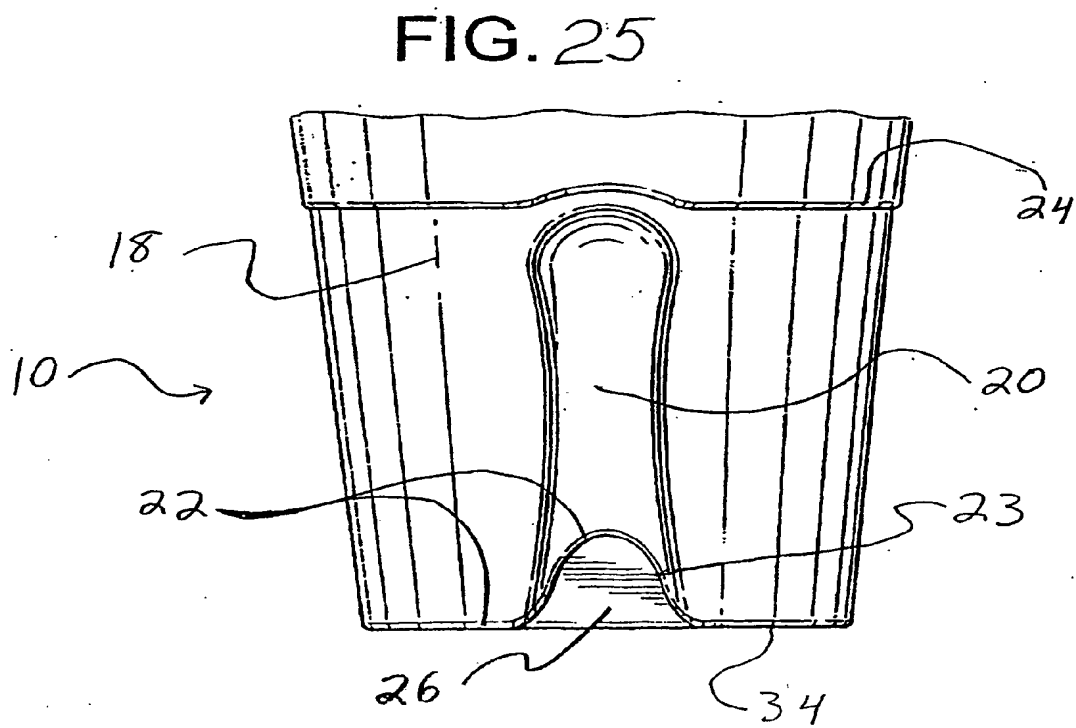

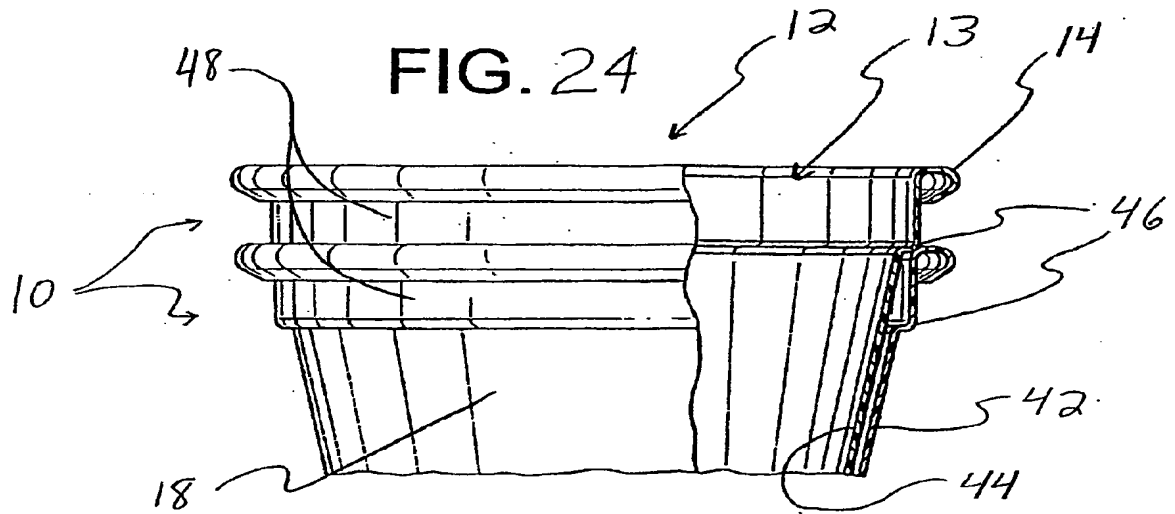

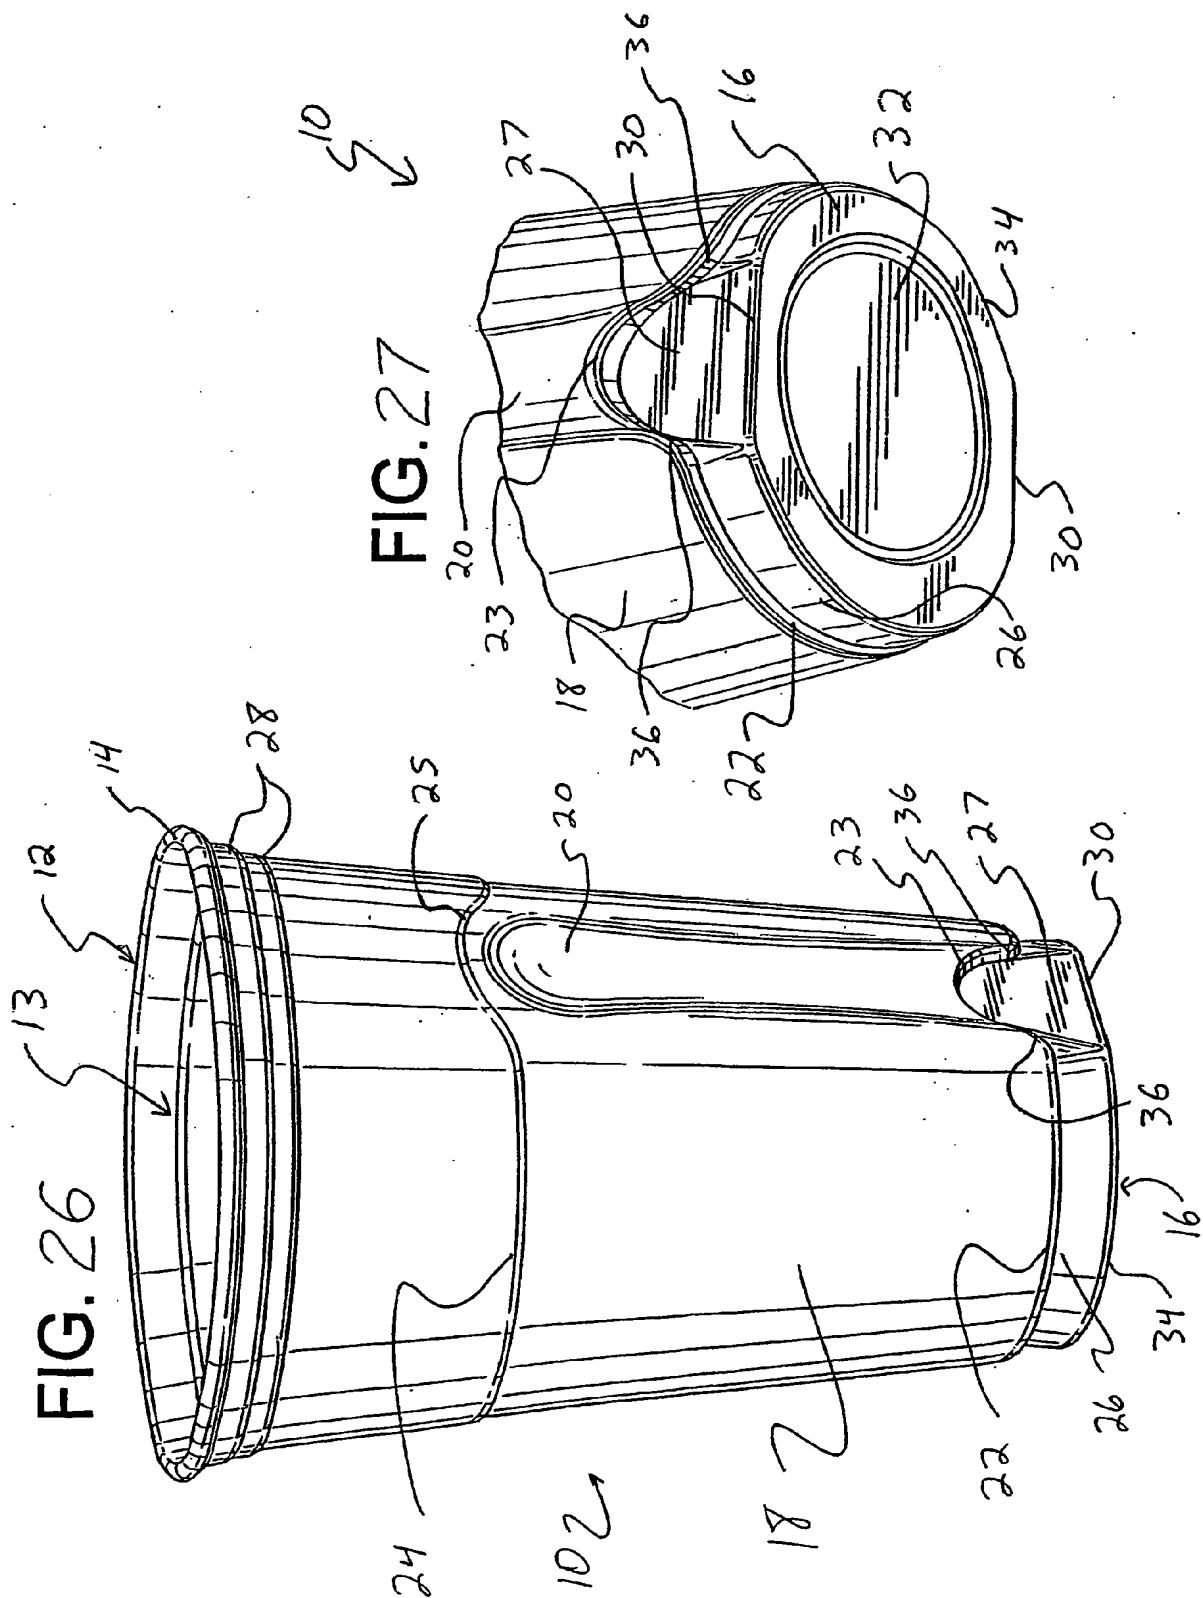

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 3288340 A [0008]
- GB 1461394 A [0009]